


Luminaire			Measurem.			Lamp			
Code	0935		Code	0935		Code	10 led 350mA 1W		
Name	Hanging lamp 10x100		Name	Hanging lamp 10x100		Number	1		
Line	VIBIA-Slim		Date	16-11-2012		Position	Universal		
Efficiency			53.00%		Coordinate system	CG		Total Flux	954.50 lm
Maximum value			473.16 cd/klm		Position	C=0.00 G=0.00		Double Symmetrical	
Round Luminaire			Diam.	690 mm		Height	1000 mm		
Round Luminous Area			Diam.	690 mm		Height	10 mm		
Horizontal Luminous Area			0.373928 m2		Emitting area on Plane 180°		0.006900 m2		
Emitting area on Plane 0°			0.006900 m2		Emitting area on Plane 270°		0.006900 m2		
Emitting area on Plane 90°			0.006900 m2		Glare area at 76°		0.097156 m2		
Symmetry Type			Double Symmetrical		Maximum Gamma Angle		180		
Measurement Distance			0.00		Measurement Flux		954.50 lm		
Operator			Asselum		Source voltage		230.00 V		
Temperature			20.00 °C		Source current				
Humidity			50.00 %		Photocell				
Notes									
Luminaire Lamps									
Line	Code		Name		Flux [lm]		Pow. [W]	Q.ty	
- VIBIA	10 led 350mA 1W		10 led 350mA 1W		954.50		10.00	1	
C.I.E.	67 84 94 88 53		D DIN 5040		B51				
F UTE	0.47 C + 0.06 T		B NBN		BZ 1 / 0.8 / BZ 2 / 2 / BZ 3				

Diam=690mm



C Halfplanes

 180.0 — 0.0
 270.0 — 90.0

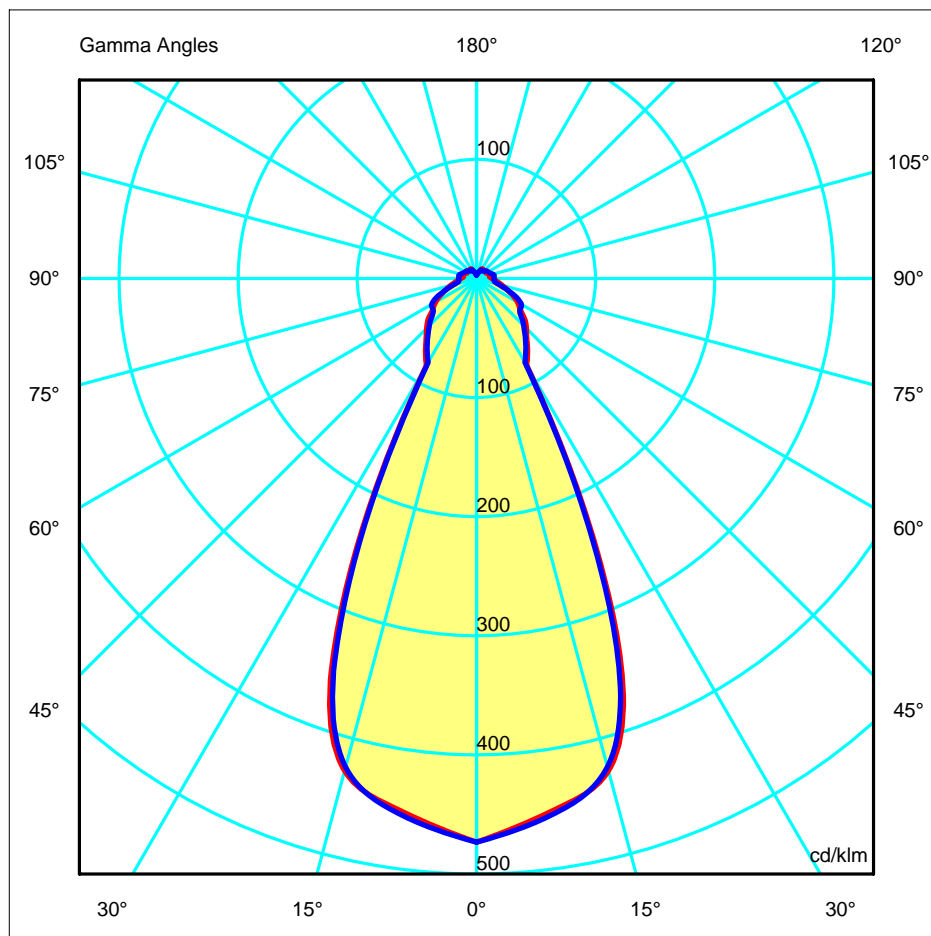 ULOR 6.32 %
 DLOR 46.68 %
 RN 11.92 %


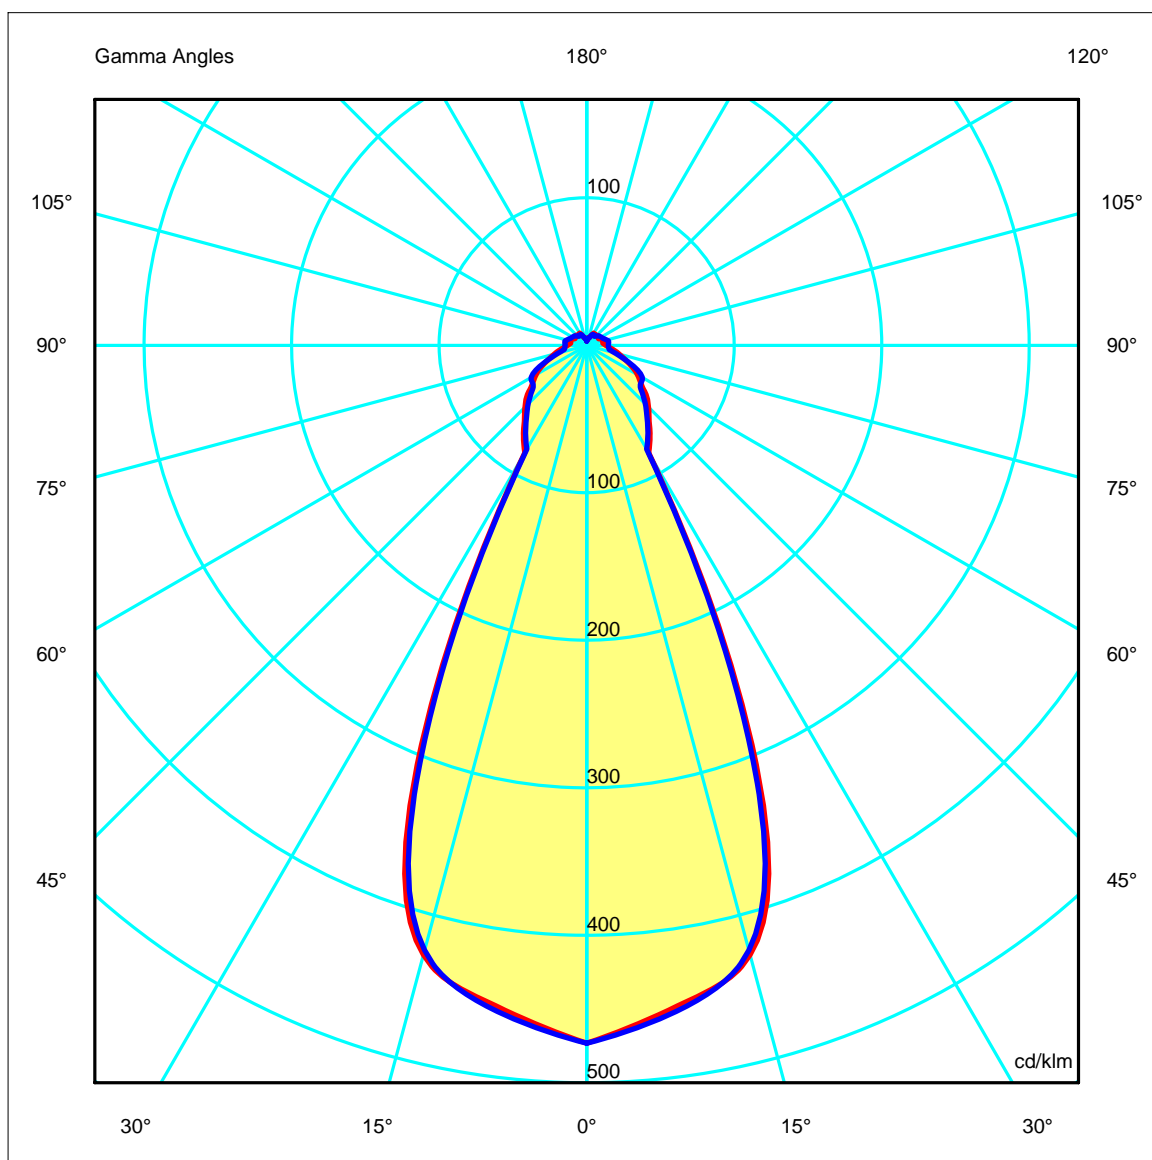

Luminaire		Measur.		Lamp						
Code	0935	Code	0935	Code	10 led 350mA 1W					
Name	Hanging lamp 10x100	Name	Hanging lamp 10x100	Number	1					
Line	VIBIA-Slim	Date	16-11-2012	Position	Universal					
Efficiency	53.00%	Coordinate system	CG	Total Flux	954.50 lm					
Maximum value	473.16 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical						
Luminous Intensity Table cd/klm Table 1/1										
	C 0.00	C 10.00	C 20.00	C 30.00	C 40.00	C 50.00	C 60.00	C 70.00	C 80.00	C 90.00
G 0.0	473.16	473.16	473.16	473.16	473.16	473.16	473.16	473.16	473.16	473.16
G 10.0	446.95	445.62	443.26	441.72	445.78	438.39	444.33	448.88	450.77	448.99
G 20.0	358.45	354.14	354.21	354.48	351.16	351.68	361.40	355.03	350.36	350.57
G 30.0	84.08	86.52	84.62	77.97	83.54	83.83	77.01	82.72	83.84	81.19
G 40.0	65.50	66.14	67.06	63.97	61.56	63.94	63.74	59.88	62.73	63.43
G 50.0	53.02	60.05	59.18	54.15	54.73	52.40	53.67	51.30	52.38	48.77
G 60.0	39.70	41.31	41.53	38.71	41.96	38.45	42.02	38.91	42.54	43.47
G 70.0	27.46	28.29	25.93	28.82	28.62	25.86	24.40	26.43	25.57	27.01
G 80.0	18.73	16.63	17.39	19.38	17.48	17.62	17.68	19.45	17.68	15.29
G 90.0	12.88	12.38	16.23	14.02	11.87	12.89	13.02	14.78	14.54	14.54
G100.0	10.99	10.66	10.21	10.99	9.90	12.27	10.44	12.20	11.71	15.14
G110.0	11.72	11.91	12.81	10.92	10.89	11.68	12.64	11.85	13.70	12.72
G120.0	9.13	9.80	8.91	11.22	11.68	12.10	10.61	9.22	11.89	11.18
G130.0	10.17	7.75	8.86	10.03	8.91	11.07	9.48	9.41	9.26	9.94
G140.0	9.02	9.22	7.45	9.07	7.73	8.12	8.06	9.15	8.37	8.11
G150.0	9.57	9.27	8.05	7.42	7.00	7.72	7.91	7.58	7.01	8.45
G160.0	5.48	5.34	5.28	5.57	6.18	6.58	5.54	4.81	5.54	6.07
G170.0	5.02	5.01	5.55	4.67	4.69	4.15	3.80	4.03	4.88	4.35
G180.0	2.88	2.88	2.88	2.88	2.88	2.88	2.88	2.88	2.88	2.88

Luminaire		Measur.		Lamp	
Code	0935	Code	0935	Code	10 led 350mA 1W
Name	Hanging lamp 10x100	Name	Hanging lamp 10x100	Number	1
Line	VIBIA-Slim	Date	16-11-2012	Position	Universal
Efficiency	53.00%	Coordinate system	CG	Total Flux	954.50 lm
Maximum value	473.16 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

Diam=690mm


C Halfplanes

180.0 ————— 0.0
 270.0 ————— 90.0




Luminaire		Measurem.		Lamp	
Code	0935	Code	0935	Code	10 led 350mA 1W
Name	Hanging lamp 10x100	Name	Hanging lamp 10x100	Number	1
Line	VIBIA-Slim	Date	16-11-2012	Position	Universal
Efficiency	53.00%	Coordinate system	CG	Total Flux	954.50 lm
Maximum value	473.16 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

Diam=690mm



C Halfplanes

180.0 ————— 0.0
 270.0 ————— 90.0

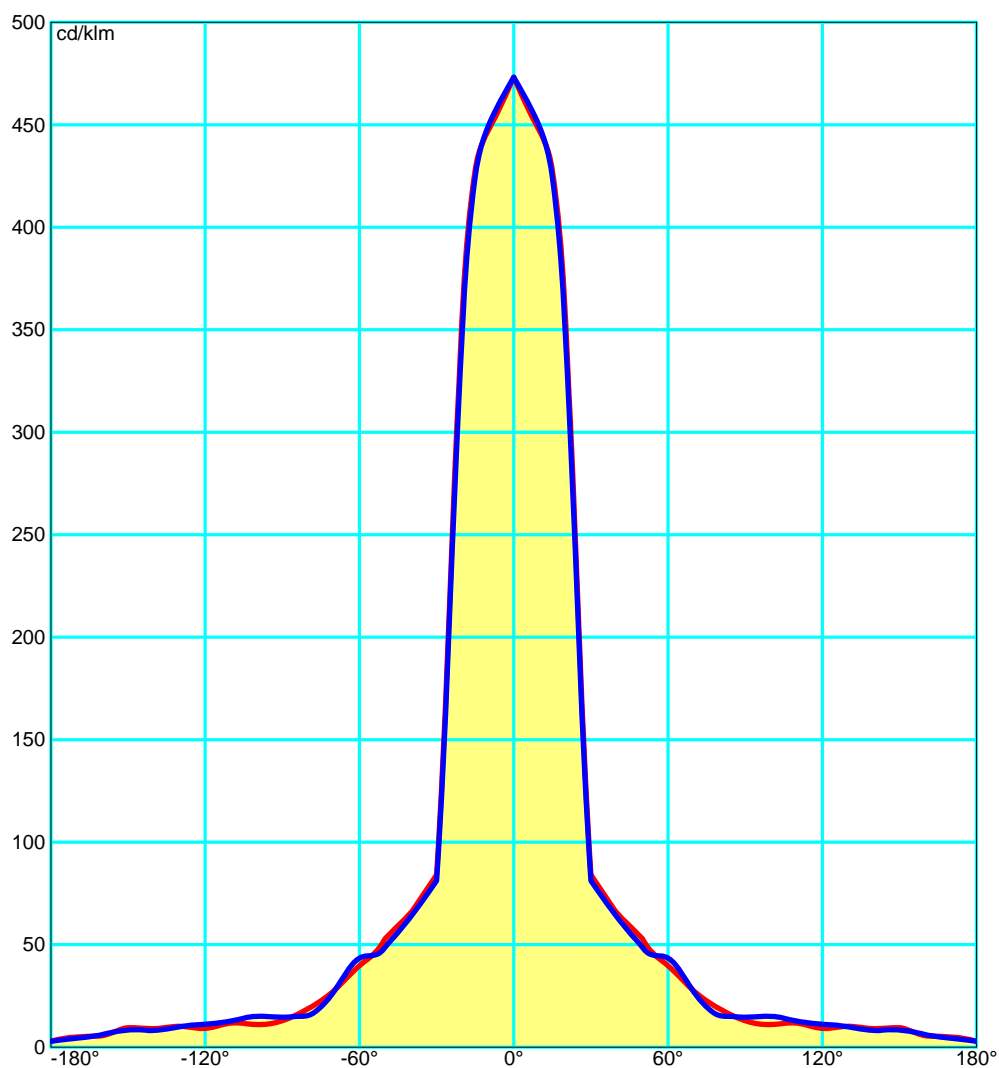

Luminaire		Measur.		Lamp	
Code	0935	Code	0935	Code	10 led 350mA 1W
Name	Hanging lamp 10x100	Name	Hanging lamp 10x100	Number	1
Line	VIBIA-Slim	Date	16-11-2012	Position	Universal
Efficiency	53.00%	Coordinate system	CG	Total Flux	954.50 lm
Maximum value	473.16 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

UGR
S = 0.250


Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions										
RoomDimensions	ViewedCrosswise					ViewedEndwise				
	x=2H y=2H	x=2H y=3H	x=2H y=4H	x=2H y=6H	x=2H y=8H	x=2H y=12H	x=4H y=2H	x=4H y=3H	x=4H y=4H	x=4H y=6H
x=2H y=2H	4.4	5.4	4.9	5.8	6.1	4.3	5.3	4.7	5.7	6.1
x=2H y=3H	6.2	7.1	6.7	7.5	7.8	6.0	6.9	6.5	7.3	7.8
x=2H y=4H	7.0	7.9	7.5	8.3	8.6	6.8	7.6	7.3	8.1	8.6
x=2H y=6H	7.9	8.7	8.4	9.2	9.4	7.6	8.3	8.1	8.8	9.4
x=2H y=8H	8.4	9.1	8.9	9.6	9.8	8.1	8.8	8.6	9.3	9.8
x=2H y=12H	9.0	9.7	9.5	10.2	10.5	8.7	9.4	9.3	9.9	10.5
x=4H y=2H	5.2	6.0	5.7	6.5	6.8	5.0	5.9	5.5	6.3	6.8
x=4H y=3H	7.2	7.9	7.7	8.4	8.7	6.9	7.6	7.4	8.1	8.7
x=4H y=4H	8.1	8.8	8.7	9.3	9.6	7.9	8.5	8.4	9.0	9.6
x=4H y=6H	9.1	9.7	9.7	10.3	10.7	9.0	9.5	9.6	10.1	10.7
x=4H y=8H	9.7	10.2	10.3	10.8	11.3	9.6	10.1	10.2	10.7	11.3
x=4H y=12H	10.4	10.8	11.0	11.4	12.1	10.4	10.8	11.0	11.4	12.1
x=8H y=4H	8.6	9.1	9.2	9.7	10.1	8.3	8.8	9.0	9.4	10.1
x=8H y=6H	9.9	10.3	10.5	10.9	11.4	9.7	10.1	10.4	10.7	11.4
x=8H y=8H	10.7	11.0	11.3	11.6	12.3	10.6	10.9	11.2	11.6	12.3
x=8H y=12H	11.6	11.9	12.2	12.5	13.3	11.6	11.9	12.3	12.6	13.3
x=12H y=4H	8.7	9.1	9.3	9.7	10.2	8.5	8.9	9.1	9.5	10.2
x=12H y=6H	10.1	10.4	10.7	11.1	11.6	9.9	10.3	10.6	10.9	11.6
x=12H y=8H	10.9	11.3	11.6	11.9	12.6	10.9	11.2	11.5	11.8	12.6

Luminaire		Measur.		Lamp	
Code	0935	Code	0935	Code	10 led 350mA 1W
Name	Hanging lamp 10x100	Name	Hanging lamp 10x100	Number	1
Line	VIBIA-Slim	Date	16-11-2012	Position	Universal
Efficiency	53.00%	Coordinate system	CG	Total Flux	954.50 lm
Maximum value	473.16 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.45	0.90	1.35	1.81	2.26	OC	0.45	0.89	1.34	1.79	2.23
OB	0.45	0.90	1.35	1.81	2.26	OD	0.45	0.89	1.34	1.79	2.23

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	451.63	438.57	408.33	204.77	71.39	56.56	42.78	32.13	21.54	14.74
OB	451.63	438.57	408.33	204.77	71.39	56.56	42.78	32.13	21.54	14.74
OC	451.63	441.09	405.18	198.46	69.02	53.55	42.67	34.93	18.66	14.24
OD	451.63	441.09	405.18	198.46	69.02	53.55	42.67	34.93	18.66	14.24

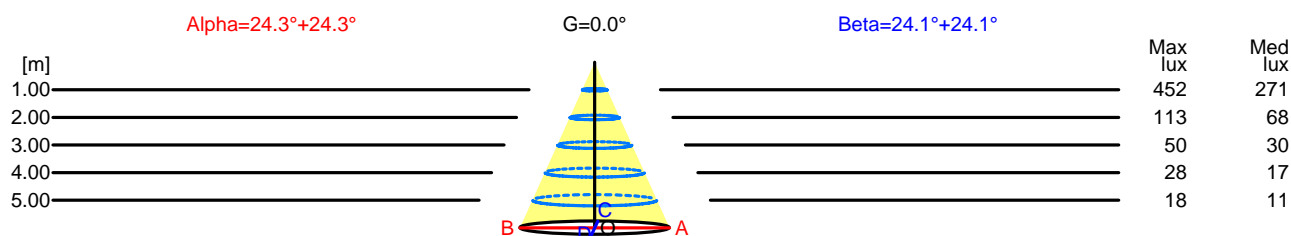


H[m]	D[m]	Max lux	Med lux	Alpha=24.3°+24.3°	G=0.0	
1.00	0.90	452	271			
2.00	1.81	113	68			
3.00	2.71	50	30			
4.00	3.61	28	17			
5.00	4.51	18	11			

H[m]	D[m]	Max lux	Med lux	Beta=24.1°+24.1°	G=0.0	
1.00	0.89	452	271			
2.00	1.79	113	68			
3.00	2.68	50	30			
4.00	3.57	28	17			
5.00	4.47	18	11			

Luminaire		Measurem.		Lamp	
Code	0935	Code	0935	Code	10 led 350mA 1W
Name	Hanging lamp 10x100	Name	Hanging lamp 10x100	Number	1
Line	VIBIA-Slim	Date	16-11-2012	Position	Universal
Efficiency	53.00%	Coordinate system	CG	Total Flux	954.50 lm
Maximum value	473.16 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

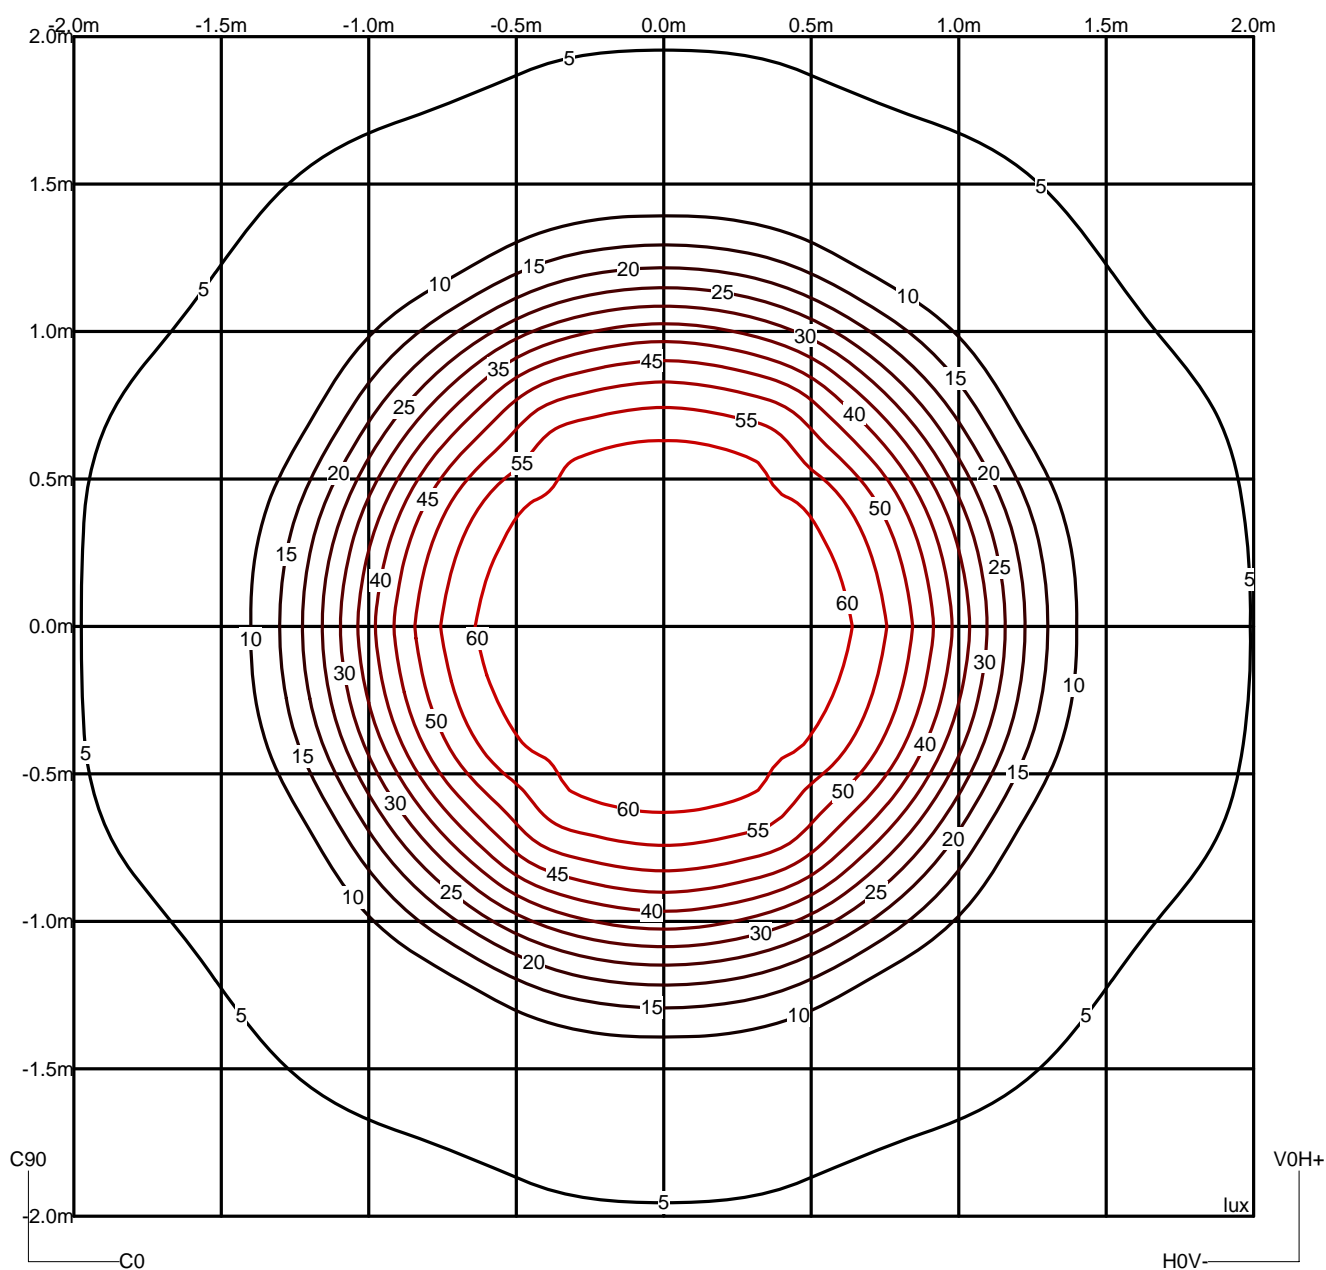

Luminaire				Measur.				Lamp			
Code	0935			Code	0935			Code	10 led 350mA 1W		
Name	Hanging lamp 10x100			Name	Hanging lamp 10x100			Number	1		
Line	VIBIA-Slim			Date	16-11-2012			Position	Universal		
Efficiency	53.00%			Coordinate system	CG			Total Flux	954.50 lm		
Maximum value	473.16 cd/klm			Position	C=0.00 G=0.00			Double Symmetrical			


Utilizations CIE

Mounting	Direct				Normalization				Normalised				Suspension Ratio				3				Standard CIE Settings							
	Ceiling																											
K	8873	8773	8871	8771	7773	7771	7753	7553	7751	7551	7731	7331	7711	7111	5551	5531	5331	5511	5111	3331	3311	1111	0000					
0.60	147	132	120	108	126	103	94	80	79	67	62	47	51	35	63	50	45	41	33	42	35	30	24					
0.80	169	155	129	119	147	114	113	99	89	78	71	57	58	42	73	59	54	49	40	51	42	37	28					
1.00	183	170	133	124	162	119	128	114	95	86	77	64	64	49	80	66	61	55	47	57	48	43	32					
1.25	196	185	135	128	176	123	143	129	101	92	83	71	70	56	86	72	67	61	53	64	54	49	35					
1.50	206	196	135	130	186	125	154	142	104	97	88	76	74	61	91	77	73	66	59	69	60	54	38					
2.00	219	210	134	129	200	125	172	161	108	102	94	84	82	70	96	84	80	74	67	77	68	63	42					
2.50	227	220	132	129	210	125	184	174	110	105	98	89	87	77	100	89	86	80	74	82	74	69	45					
3.00	232	226	130	128	216	124	193	185	111	107	100	93	91	82	102	93	90	84	79	86	79	74	47					
4.00	240	235	129	127	225	123	206	199	113	110	104	99	96	89	106	98	95	90	86	92	85	81	51					
5.00	245	241	127	126	231	123	215	209	114	112	107	102	100	93	108	101	99	95	91	95	90	86	53					
10.00	256	254	124	123	244	121	234	231	116	115	112	110	108	104	112	108	107	104	102	104	100	97	57					
20.00	261	260	121	121	250	119	245	243	117	116	115	114	113	111	113	111	111	110	108	108	107	104	60					
	Wall																											
K	8873	8773	8871	8771	7773	7771	7753	7553	7751	7551	7731	7331	7711	7111	5551	5531	5331	5511	5111	3331	3311	1111	0000					
0.60	203	195	168	162	191	159	150	144	128	123	108	102	93	87	121	102	100	89	86	99	87	85	74					
0.80	231	222	185	180	216	176	176	168	147	141	126	119	110	104	137	119	117	105	102	115	102	99	87					
1.00	249	240	194	189	233	184	194	186	157	152	137	131	122	115	147	130	127	116	113	125	112	109	95					
1.25	266	258	202	198	248	192	212	204	168	163	149	142	134	127	157	141	138	128	124	134	123	119	103					
1.50	279	271	208	204	260	198	226	218	176	171	158	151	144	136	164	149	146	137	133	142	131	126	109					
2.00	292	285	210	207	273	200	243	235	182	178	167	161	154	147	170	157	154	146	142	149	139	133	114					
2.50	300	294	210	207	280	201	254	246	185	181	172	166	160	153	172	161	159	151	148	152	144	137	117					
3.00	304	299	208	206	284	199	260	253	186	183	174	169	164	157	173	163	161	154	151	154	146	139	117					
4.00	314	309	210	208	293	201	273	267	191	188	181	176	172	166	177	169	168	162	159	159	153	145	122					
5.00	320	317	211	210	299	203	282	277	194	192	186	182	178	173	181	174	172	167	165	163	158	149	125					
10.00	330	328	210	210	309	203	299	296	198	196	193	190	188	185	184	180	179	176	174	168	165	155	128					
20.00	324	322	197	197	302	190	297	295	187	187	185	183	182	180	174	172	171	170	168	159	158	146	118					
	Working Pl.																											
K	8873	8773	8871	8771	7773	7771	7753	7553	7751	7551	7731	7331	7711	7111	5551	5531	5331	5511	5111	3331	3311	1111	0000					
0.60	355	347	331	325	341	321	292	285	281	276	254	248	235	230	272	249	246	231	228	245	228	226	219					
0.80	402	392	370	363	384	357	334	326	319	312	291	283	270	263	307	283	280	264	261	277	260	257	249					
1.00	439	429	400	394	419	387	371	361	350	344	323	315	302	294	336	313	310	295	291	306	289	285	277					
1.25	474	464	427	421	451	413	405	395	379	373	353	344	333	323	363	341	338	323	318	332	316	310	302					
1.50	500	490	446	441	475	432	432	421	401	394	376	367	356	346	383	363	359	345	340	352	337	330	321					
2.00	538	530	474	470	511	460	473	463	434	428	412	403	394	384	414	397	393	381	376	384	371	361	353					
2.50	564	556	492	488	535	477	502	492	455	450	436	428	420	410	435	419	416	406	400	405	393	382	373					
3.00	582	575	504	501	553	489	523	513	471	466	454	446	439	430	449	436	432	424	418	420	410	398	389					
4.00	604	598	518	516	574	504	549	541	489	485	475	468	463	454	466	455	452	445	440	438	429	415	406					
5.00	618	613	527	525	587	513	566	559	500	497	488	482	478	470	477	468	465	459	455	449	442	427	417					
10.00	648	646	545	543	616	531	604	599	524	522	518	514	512	507	500	495	494	490	487	474	470	451	441					
20.00	665	663	554	553	632	541	626	623	537	536	534	532	531	528	513	510	510	508	506	488	486	466	451					

Luminaire		Measur.		Lamp	
Code	0935	Code	0935	Code	10 led 350mA 1W
Name	Hanging lamp 10x100	Name	Hanging lamp 10x100	Number	1
Line	VIBIA-Slim	Date	16-11-2012	Position	Universal
Efficiency	53.00%	Coordinate system	CG	Total Flux	954.50 lm
Maximum value	473.16 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	


Average Luminance [cd/m²]										
0.0°	45°	50°	55°	60°	65°	70°	75°	80°	85°	---
90.0°	210	206	194	196	196	195	208	249	374	---
	199	190	194	215	213	192	180	204	361	---

Flush mounted or longitudinal view												
		Illumination(lx)										
A	A	2000	1000	750	500		<300					1.15
B	1		2000	1500	1000	750	500	<300				1.5
C					2000		1000	500	<300			1.85
D	2						2000	1000	500	<300		2.2
E	3							2000	1000	500	<300	2.55

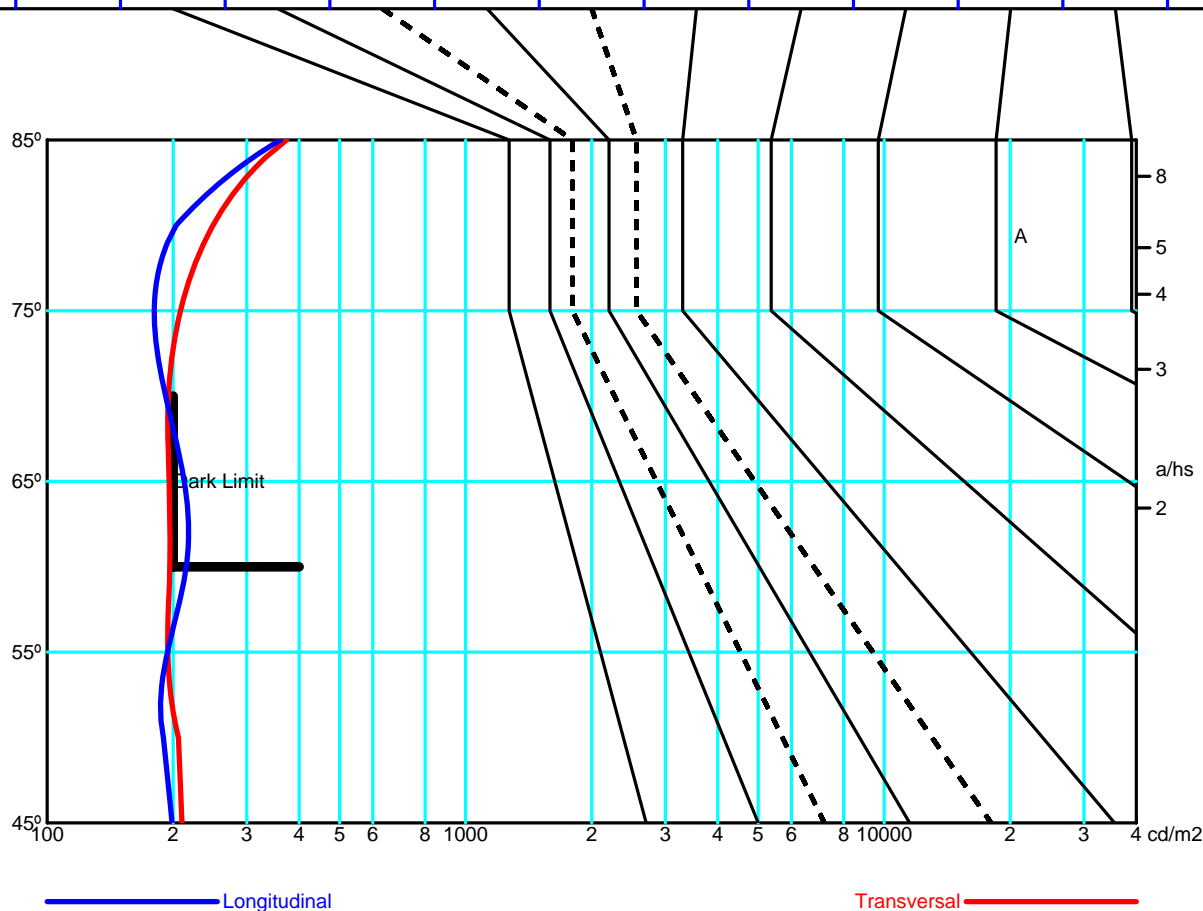

Luminaire		Measur.		Lamp	
Code	0935	Code	0935	Code	10 led 350mA 1W
Name	Hanging lamp 10x100	Name	Hanging lamp 10x100	Number	1
Line	VIBIA-Slim	Date	16-11-2012	Position	Universal
Efficiency	53.00%	Coordinate system	CG	Total Flux	954.50 lm
Maximum value	473.16 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

Luminance

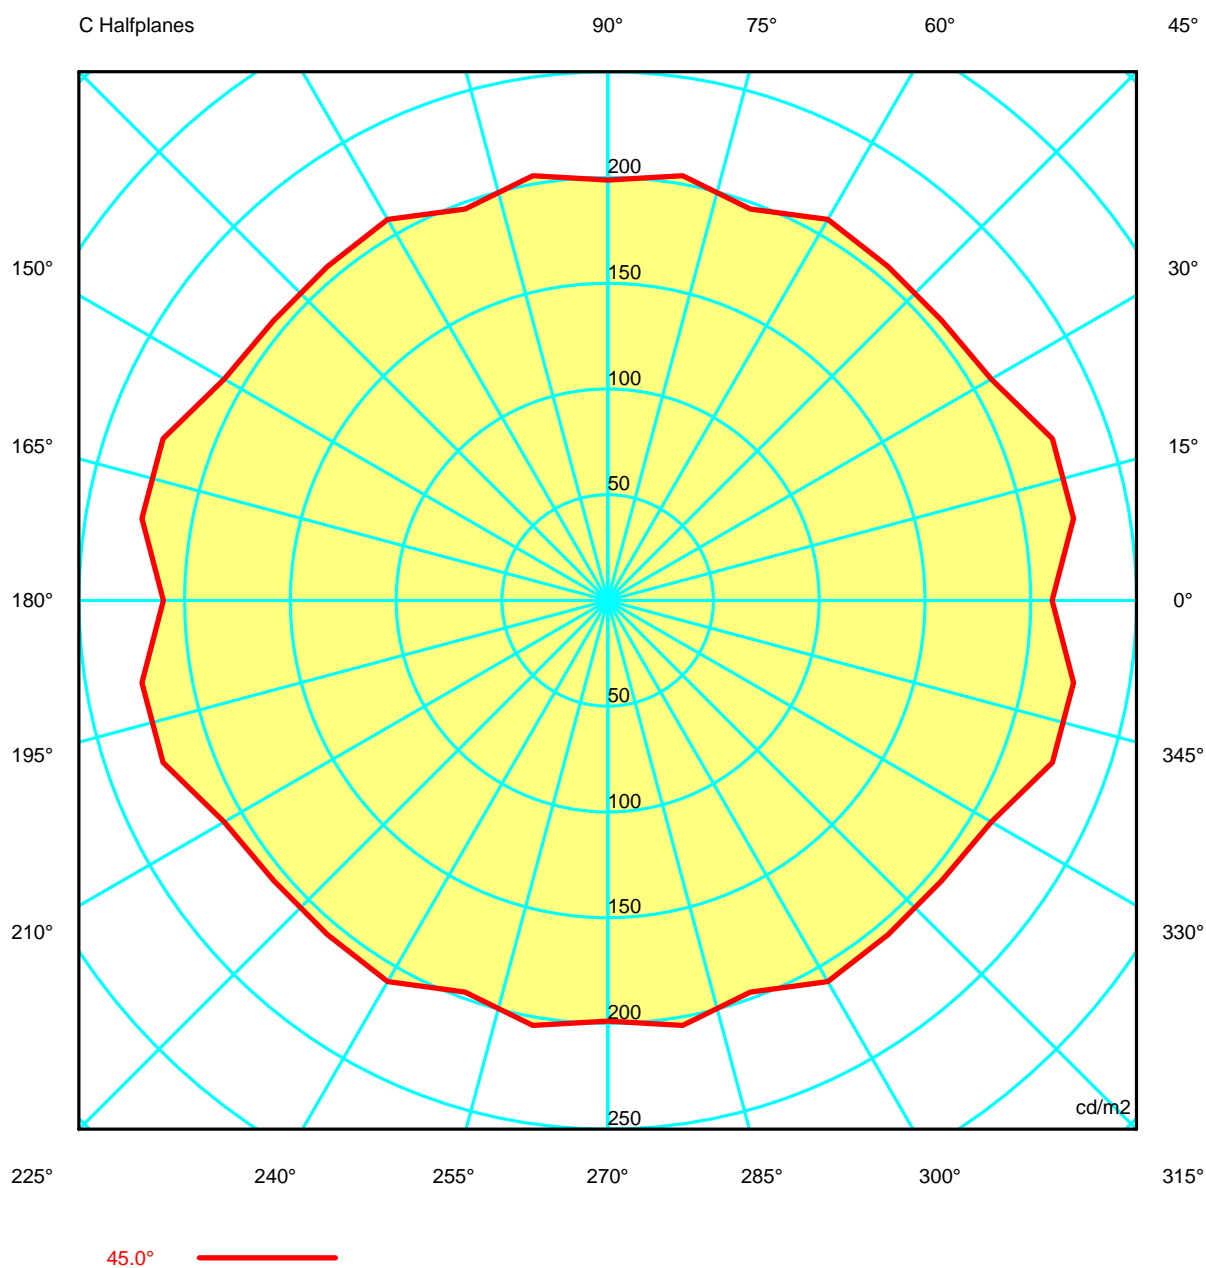

Luminaire				Measurem.				Lamp					
Code	0935			Code	0935			Code	10 led 350mA 1W				
Name	Hanging lamp 10x100			Name	Hanging lamp 10x100			Number	1				
Line	VIBIA-Slim			Date	16-11-2012			Position	Universal				
Efficiency	53.00%			Coordinate system	CG			Total Flux	954.50 lm				
Maximum value	473.16 cd/klm			Position	C=0.00 G=0.00			Double Symmetrical					
Luminance cd/m2 Table 1/3													
	C 0.00	C 10.00	C 20.00	C 30.00	C 40.00	C 50.00	C 60.00	C 70.00	C 80.00	C 90.00	C 100.00	C 110.00	C 120.00
G 0.0	1207.79	1207.79	1207.79	1207.79	1207.79	1207.79	1207.79	1207.79	1207.79	1207.79	1207.79	1207.79	1207.79
G 5.0	1175.45	1175.06	1170.40	1166.74	1176.34	1162.32	1168.62	1180.47	1185.96	1182.22	1185.96	1180.47	1168.62
G 10.0	1154.74	1151.30	1145.22	1141.23	1151.71	1132.61	1147.98	1159.73	1164.62	1160.02	1164.62	1159.73	1147.98
G 15.0	1124.97	1115.13	1112.49	1112.71	1111.32	1101.30	1128.05	1122.34	1117.54	1116.29	1117.54	1122.34	1128.05
G 20.0	967.23	955.59	955.77	956.49	947.55	948.94	975.19	957.98	945.38	945.95	945.38	957.98	975.19
G 25.0	599.07	596.82	594.09	584.59	587.89	590.68	593.61	592.29	584.72	580.62	584.72	592.29	593.61
G 30.0	245.22	252.33	246.80	227.41	243.63	244.48	224.60	241.26	244.50	236.80	244.50	241.26	224.60
G 35.0	230.09	234.83	233.32	218.34	223.19	227.30	216.50	219.36	225.45	222.47	225.45	219.36	216.50
G 40.0	214.94	217.05	220.05	209.91	202.00	209.83	209.14	196.51	205.84	208.15	205.84	196.51	209.14
G 45.0	210.05	223.65	223.74	209.35	206.10	206.20	208.07	197.05	204.01	198.86	204.01	197.05	208.07
G 50.0	206.02	233.33	229.98	210.43	212.68	203.63	208.53	199.34	203.54	189.52	203.54	199.34	208.53
G 55.0	194.34	216.26	215.00	194.07	206.27	191.24	203.37	191.47	202.75	193.86	202.75	191.47	203.37
G 60.0	196.40	204.39	205.44	191.50	207.58	190.24	207.87	192.48	210.44	215.04	210.44	192.48	207.87
G 65.0	195.61	200.34	194.04	195.78	206.19	186.50	193.47	189.21	199.80	212.61	199.80	189.21	193.47
G 70.0	195.05	200.92	184.22	204.74	203.30	183.66	173.33	187.75	181.62	191.85	181.62	187.75	173.33
G 75.0	208.20	201.98	187.77	219.69	206.92	195.07	182.52	205.52	186.85	180.38	186.85	205.52	182.52
G 80.0	249.23	221.27	231.47	257.94	232.56	234.54	235.28	258.87	235.31	203.52	235.31	258.87	235.28
G 85.0	373.51	333.77	410.99	393.06	340.28	357.02	373.59	410.46	389.26	360.80	389.26	410.46	373.59
G 90.0	1782.19	1712.46	2245.61	1938.90	1641.73	1783.80	1801.14	2044.63	2011.47	2011.47	2011.47	2044.63	1801.14

Luminaire				Measurem.				Lamp					
Code	0935			Code	0935			Code	10 led 350mA 1W				
Name	Hanging lamp 10x100			Name	Hanging lamp 10x100			Number	1				
Line	VIBIA-Slim			Date	16-11-2012			Position	Universal				
Efficiency		53.00%		Coordinate system		CG		Total Flux		954.50 lm			
Maximum value		473.16 cd/klm		Position		C=0.00 G=0.00		Double Symmetrical					
Luminance cd/m2 Table 2/3													
	C 130.00	C 140.00	C 150.00	C 160.00	C 170.00	C 180.00	C 190.00	C 200.00	C 210.00	C 220.00	C 230.00	C 240.00	C 250.00
G 0.0	1207.79	1207.79	1207.79	1207.79	1207.79	1207.79	1207.79	1207.79	1207.79	1207.79	1207.79	1207.79	1207.79
G 5.0	1162.32	1176.34	1166.74	1170.40	1175.06	1175.45	1175.06	1170.40	1166.74	1176.34	1162.32	1168.62	1180.47
G 10.0	1132.61	1151.71	1141.23	1145.22	1151.30	1154.74	1151.30	1145.22	1141.23	1151.71	1132.61	1147.98	1159.73
G 15.0	1101.30	1111.32	1112.71	1112.49	1115.13	1124.97	1115.13	1112.49	1112.71	1111.32	1101.30	1128.05	1122.34
G 20.0	948.94	947.55	956.49	955.77	955.59	967.23	955.59	955.77	956.49	947.55	948.94	975.19	957.98
G 25.0	590.68	587.89	584.59	594.09	596.82	599.07	596.82	594.09	584.59	587.89	590.68	593.61	592.29
G 30.0	244.48	243.63	227.41	246.80	252.33	245.22	252.33	246.80	227.41	243.63	244.48	224.60	241.26
G 35.0	227.30	223.19	218.34	233.32	234.83	230.09	234.83	233.32	218.34	223.19	227.30	216.50	219.36
G 40.0	209.83	202.00	209.91	220.05	217.05	214.94	217.05	220.05	209.91	202.00	209.83	209.14	196.51
G 45.0	206.20	206.10	209.35	223.74	223.65	210.05	223.65	223.74	209.35	206.10	206.20	208.07	197.05
G 50.0	203.63	212.68	210.43	229.98	233.33	206.02	233.33	229.98	210.43	212.68	203.63	208.53	199.34
G 55.0	191.24	206.27	194.07	215.00	216.26	194.34	216.26	215.00	194.07	206.27	191.24	203.37	191.47
G 60.0	190.24	207.58	191.50	205.44	204.39	196.40	204.39	205.44	191.50	207.58	190.24	207.87	192.48
G 65.0	186.50	206.19	195.78	194.04	200.34	195.61	200.34	194.04	195.78	206.19	186.50	193.47	189.21
G 70.0	183.66	203.30	204.74	184.22	200.92	195.05	200.92	184.22	204.74	203.30	183.66	173.33	187.75
G 75.0	195.07	206.92	219.69	187.77	201.98	208.20	201.98	187.77	219.69	206.92	195.07	182.52	205.52
G 80.0	234.54	232.56	257.94	231.47	221.27	249.23	221.27	231.47	257.94	232.56	234.54	235.28	258.87
G 85.0	357.02	340.28	393.06	410.99	333.77	373.51	333.77	410.99	393.06	340.28	357.02	373.59	410.46
G 90.0	1783.80	1641.73	1938.90	2245.61	1712.46	1782.19	1712.46	2245.61	1938.90	1641.73	1783.80	1801.14	2044.63

Luminaire				Measurem.				Lamp			
Code	0935			Code	0935			Code	10 led 350mA 1W		
Name	Hanging lamp 10x100			Name	Hanging lamp 10x100			Number	1		
Line	VIBIA-Slim			Date	16-11-2012			Position	Universal		
Efficiency		53.00%		Coordinate system		CG		Total Flux		954.50 lm	
Maximum value		473.16 cd/klm		Position		C=0.00 G=0.00		Double Symmetrical			
Luminance cd/m2 Table 3/3											
	C 260.00	C 270.00	C 280.00	C 290.00	C 300.00	C 310.00	C 320.00	C 330.00	C 340.00	C 350.00	
G 0.0	1207.79	1207.79	1207.79	1207.79	1207.79	1207.79	1207.79	1207.79	1207.79	1207.79	1207.79
G 5.0	1185.96	1182.22	1185.96	1180.47	1168.62	1162.32	1176.34	1166.74	1170.40	1175.06	
G 10.0	1164.62	1160.02	1164.62	1159.73	1147.98	1132.61	1151.71	1141.23	1145.22	1151.30	
G 15.0	1117.54	1116.29	1117.54	1122.34	1128.05	1101.30	1111.32	1112.71	1112.49	1115.13	
G 20.0	945.38	945.95	945.38	957.98	975.19	948.94	947.55	956.49	955.77	955.59	
G 25.0	584.72	580.62	584.72	592.29	593.61	590.68	587.89	584.59	594.09	596.82	
G 30.0	244.50	236.80	244.50	241.26	224.60	244.48	243.63	227.41	246.80	252.33	
G 35.0	225.45	222.47	225.45	219.36	216.50	227.30	223.19	218.34	233.32	234.83	
G 40.0	205.84	208.15	205.84	196.51	209.14	209.83	202.00	209.91	220.05	217.05	
G 45.0	204.01	198.86	204.01	197.05	208.07	206.20	206.10	209.35	223.74	223.65	
G 50.0	203.54	189.52	203.54	199.34	208.53	203.63	212.68	210.43	229.98	233.33	
G 55.0	202.75	193.86	202.75	191.47	203.37	191.24	206.27	194.07	215.00	216.26	
G 60.0	210.44	215.04	210.44	192.48	207.87	190.24	207.58	191.50	205.44	204.39	
G 65.0	199.80	212.61	199.80	189.21	193.47	186.50	206.19	195.78	194.04	200.34	
G 70.0	181.62	191.85	181.62	187.75	173.33	183.66	203.30	204.74	184.22	200.92	
G 75.0	186.85	180.38	186.85	205.52	182.52	195.07	206.92	219.69	187.77	201.98	
G 80.0	235.31	203.52	235.31	258.87	235.28	234.54	232.56	257.94	231.47	221.27	
G 85.0	389.26	360.80	389.26	410.46	373.59	357.02	340.28	393.06	410.99	333.77	
G 90.0	2011.47	2011.47	2011.47	2044.63	1801.14	1783.80	1641.73	1938.90	2245.61	1712.46	