


<b>Luminaire</b>			<b>Measurem.</b>			<b>Lamp</b>		
Code	5373		Code	5373		Code	PL-L24W/840/4P	
Name	Ceiling lamp 60x25 no dim		Name	Ceiling lamp 60x25 no dim		Number	4	
Line	VIBIA-Link		Date	29-05-2014		Position	Universal	
Efficiency		20.46%	Coordinate system		CG	Total Flux	6000.00 lm	
Maximum value		67.98 cd/klm	Position		C=0.00 G=0.00	Double Symmetrical		
Rectangular Luminaire		Length	250 mm	Width	600 mm	Height	130 mm	
Rectangular Luminous Area		Length	230 mm	Width	580 mm	Height	0 mm	
Horizontal Luminous Area		0.133400 m2		Emitting area on Plane 180°		0.000000 m2		
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2		
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.032272 m2		
Symmetry Type		Double Symmetrical		Maximum Gamma Angle		90		
Measurement Distance		6.44		Measurement Flux		6000.00 lm		
Operator		Asselum T2		Source voltage		230.00 V		
Temperature		20.00 °C		Source current		Prc		
Humidity		59.00 %		Photocell				
Notes								
Luminaire Lamps								
Line	Code		Name			Flux [lm]	Pow. [W]	Q.ty
PHILIPS 2005 ILCOS FBT,G,C,FSQ	PL-L24W/840/4P		MASTER PL-L 24W/840/4P 2G11			1800.00	24.00	2
PHILIPS 2005 ILCOS FBT,G,C,FSQ	PL-L18W/840/4P		MASTER PL-L 18W/840/4P 2G11			1200.00	18.00	2
C.I.E.	45	76	94	100	20	D DIN 5040	A30	
F UTE	0.20 E					B NBN	BZ 5	


250mm x 600mm



C Halfplanes

180.0 — 0.0  
 270.0 — 90.0

ULOR 0.00 %  
 DLOR 20.46 %  
 RN 0.00 %

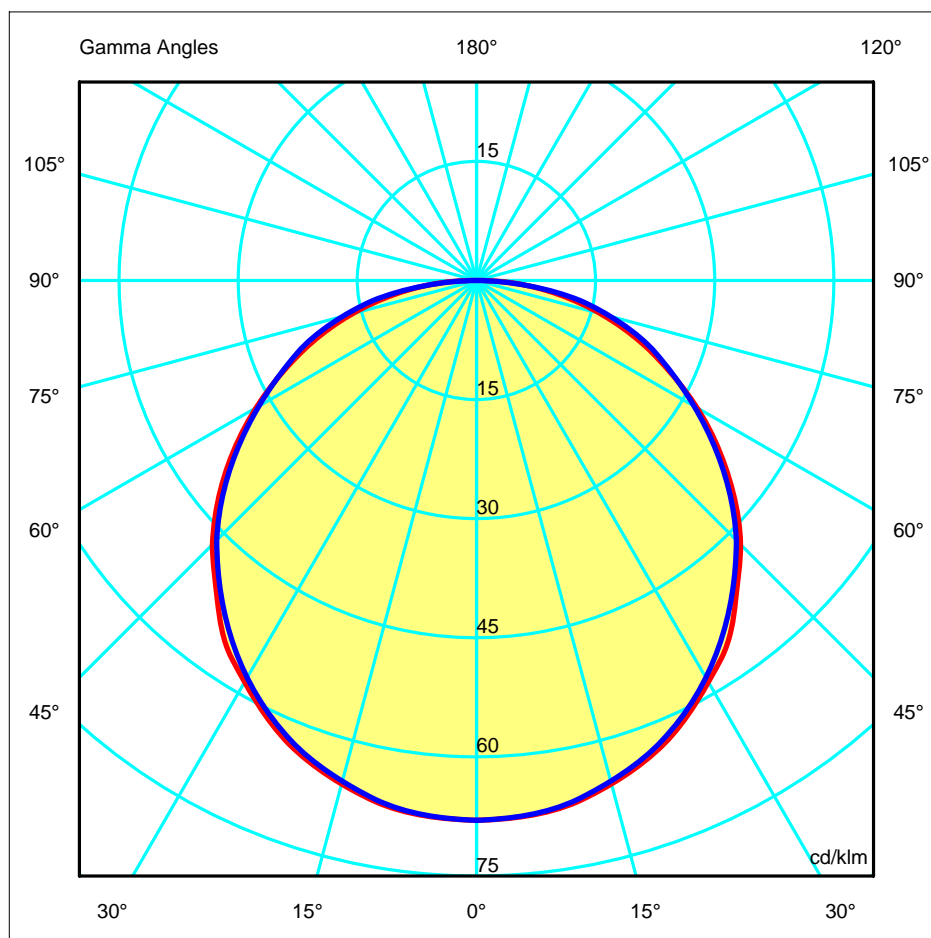

<b>Luminaire</b>		<b>Measurem.</b>		<b>Lamp</b>			
Code	5373	Code	5373	Code	PL-L24W/840/4P		
Name	Ceiling lamp 60x25 no dim	Name	Ceiling lamp 60x25 no dim	Number	4		
Line	VIBIA-Link	Date	29-05-2014	Position	Universal		
Efficiency	20.46%	Coordinate system	CG	Total Flux	6000.00 lm		
<b>Luminous Intensity Table cd/klm</b>			<b>Table 1/1</b>				
	C 0.00	C 15.00	C 30.00	C 45.00	C 60.00	C 75.00	C 90.00
G 0.0	67.98	67.98	67.98	67.98	67.98	67.98	67.98
G 5.0	67.76	67.68	67.68	67.67	67.66	67.67	67.68
G 10.0	67.09	66.82	66.76	66.81	66.80	66.79	66.86
G 15.0	65.63	65.37	65.40	65.38	65.33	65.31	65.26
G 20.0	63.85	63.45	63.32	63.41	63.38	63.29	63.39
G 25.0	61.40	60.89	60.87	60.84	60.69	60.81	60.83
G 30.0	58.39	57.76	57.80	57.71	57.74	57.81	57.76
G 35.0	55.31	54.21	54.18	54.13	54.34	54.34	54.19
G 40.0	50.97	50.26	50.53	50.38	50.36	50.35	50.26
G 45.0	47.01	46.09	45.96	45.96	46.18	46.00	46.26
G 50.0	42.33	41.43	41.40	41.45	41.32	41.27	41.61
G 55.0	37.31	36.32	36.32	36.42	36.53	36.59	36.63
G 60.0	32.08	31.00	31.11	31.21	31.50	31.62	31.68
G 65.0	26.62	25.73	25.93	26.14	26.42	26.76	26.87
G 70.0	21.54	20.46	20.41	20.91	21.74	22.04	22.58
G 75.0	16.16	15.17	15.51	16.31	16.88	17.81	17.43
G 80.0	10.81	9.98	10.59	11.96	11.76	12.22	12.20
G 85.0	5.93	5.04	5.20	5.37	5.68	5.65	5.50
G 90.0	0.17	0.18	0.19	0.20	0.22	0.22	0.23



<b>Luminaire</b>		<b>Measurem.</b>		<b>Lamp</b>	
Code	5373	Code	5373	Code	PL-L24W/840/4P
Name	Ceiling lamp 60x25 no dim	Name	Ceiling lamp 60x25 no dim	Number	4
Line	VIBIA-Link	Date	29-05-2014	Position	Universal
Efficiency	20.46%	Coordinate system	CG	Total Flux	6000.00 lm

250mm x 600mm

C Halfplanes


180.0 ————— 0.0

270.0 ————— 90.0

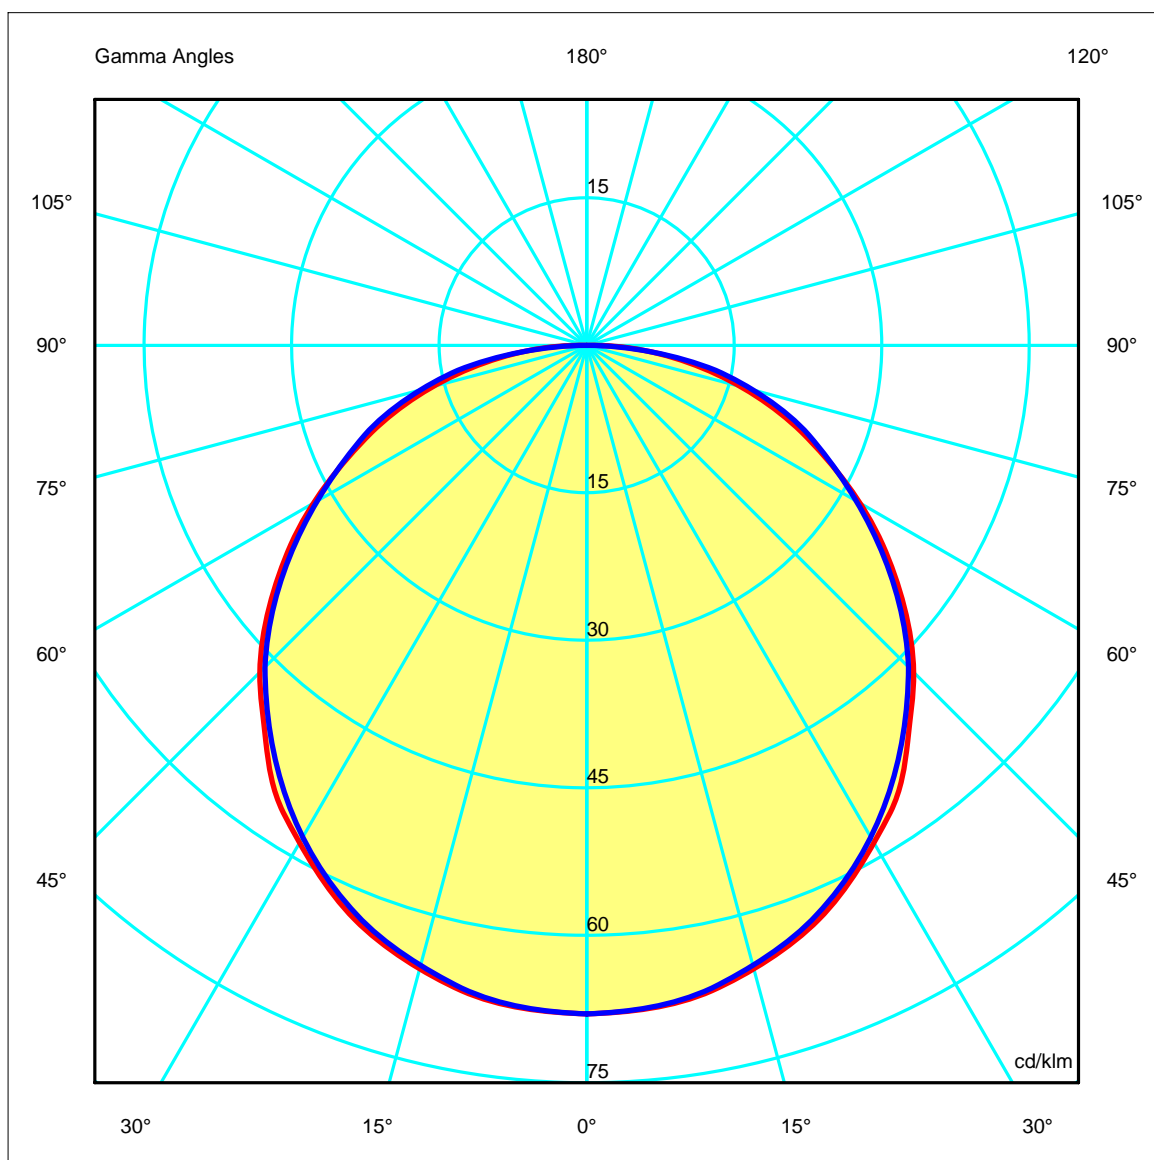


<b>Luminaire</b>		<b>Measur.</b>		<b>Lamp</b>	
Code	5373	Code	5373	Code	PL-L24W/840/4P
Name	Ceiling lamp 60x25 no dim	Name	Ceiling lamp 60x25 no dim	Number	4
Line	VIBIA-Link	Date	29-05-2014	Position	Universal
Efficiency	20.46%	Coordinate system	CG	Total Flux	6000.00 lm

250mm x 600mm



C Halfplanes

180.0 — 0.0  
 270.0 — 90.0

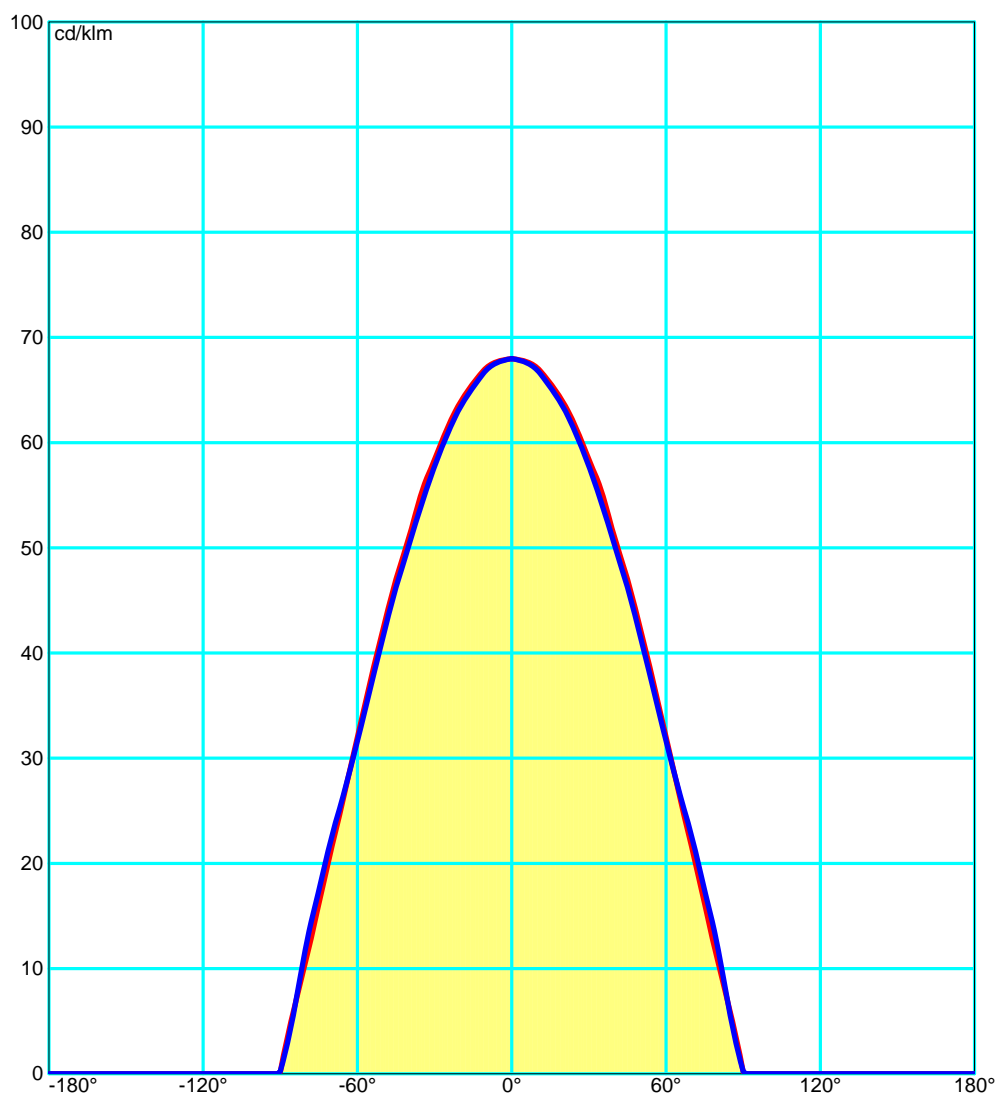

<b>Luminaire</b>		<b>Measurem.</b>		<b>Lamp</b>	
Code	5373	Code	5373	Code	PL-L24W/840/4P
Name	Ceiling lamp 60x25 no dim	Name	Ceiling lamp 60x25 no dim	Number	4
Line	VIBIA-Link	Date	29-05-2014	Position	Universal
Efficiency	20.46%	Coordinate system	CG	Total Flux	6000.00 lm

**UGR**  
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	16.1	17.5	16.4	17.7	17.9	16.1	17.5	16.4	17.7	17.9
x=2H y=3H	17.9	19.2	18.2	19.4	19.8	18.1	19.4	18.4	19.6	19.8
x=2H y=4H	18.6	19.8	19.0	20.1	20.8	19.0	20.1	19.3	20.5	20.8
x=2H y=6H	19.3	20.4	19.7	20.8	21.6	19.8	20.9	20.2	21.3	21.6
x=2H y=8H	19.7	20.7	20.0	21.0	21.9	20.2	21.2	20.6	21.6	21.9
x=2H y=12H	19.9	20.9	20.3	21.3	22.0	20.4	21.4	20.8	21.8	22.0
x=4H y=2H	16.9	18.0	17.2	18.4	18.7	16.9	18.0	17.2	18.4	18.7
x=4H y=3H	18.9	19.9	19.3	20.3	20.7	19.1	20.1	19.5	20.5	20.7
x=4H y=4H	19.8	20.7	20.2	21.0	21.9	20.2	21.1	20.6	21.4	21.9
x=4H y=6H	20.6	21.3	21.0	21.7	22.7	21.2	21.9	21.6	22.3	22.7
x=4H y=8H	21.0	21.7	21.4	22.1	23.1	21.6	22.3	22.0	22.7	23.1
x=4H y=12H	21.2	21.9	21.7	22.3	23.3	21.8	22.5	22.3	22.9	23.3
x=8H y=4H	20.3	21.0	20.7	21.4	22.2	20.7	21.3	21.1	21.8	22.2
x=8H y=6H	21.3	21.9	21.7	22.3	23.3	21.8	22.4	22.3	22.8	23.3
x=8H y=8H	21.7	22.2	22.1	22.7	23.7	22.3	22.8	22.7	23.3	23.7
x=8H y=12H	22.1	22.6	22.6	23.0	24.1	22.7	23.1	23.2	23.6	24.1
x=12H y=4H	20.3	21.0	20.8	21.4	22.2	20.6	21.3	21.1	21.7	22.2
x=12H y=6H	21.4	21.9	21.9	22.4	23.4	21.9	22.4	22.4	22.9	23.4
x=12H y=8H	21.9	22.4	22.4	22.8	23.9	22.5	22.9	23.0	23.4	23.9

<b>Luminaire</b>		<b>Measurem.</b>		<b>Lamp</b>	
Code	5373	Code	5373	Code	PL-L24W/840/4P
Name	Ceiling lamp 60x25 no dim	Name	Ceiling lamp 60x25 no dim	Number	4
Line	VIBIA-Link	Date	29-05-2014	Position	Universal
Efficiency	20.46%	Coordinate system	CG	Total Flux	6000.00 lm

Total Flux=6000.00 Luminaire Flux=1227.64

RI	0.60	0.80	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	10.00	20.00
DRR	0.29	0.37	0.45	0.52	0.57	0.66	0.72	0.76	0.81	0.85	0.92	0.96
RC	5	5	5	5	5	5	5	5	5	5	5	5

Zonal Flux per 1000 Lumen


Y°	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
ZF(Y)	6	25	53	87	123	155	181	199	205	205	205	205	205	205	205	205	205	205

CIE Flux Codes

45 76 94 100 20

C.I.E.	5
D DIN 5040	A30
F UTE	0.20 E
B NBN	BZ 5
RN	0.00000 %
BLF	1.0

LOR	20.46075 %
ULOR	0.00000 %
DLOR	20.46075 %
UFF	0.00000 %
DFF	100.00000 %
FFR	0.00000 %

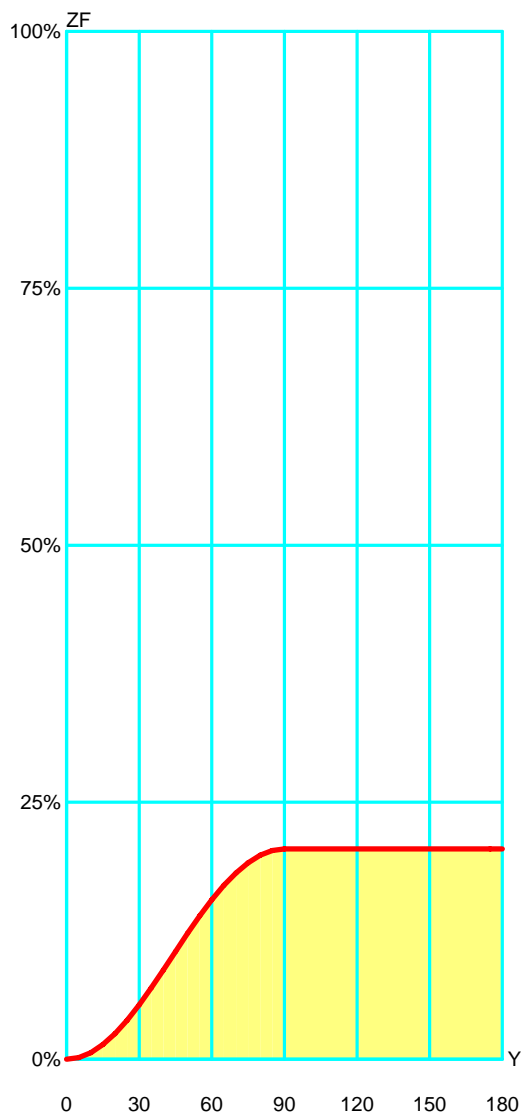


Zonal Flux				
Gamma °	Flux	Sum lm	Flux [%]	Sum [%]
0°	0.00	0.00	0.00%	0.00 %
5°	1.62	1.62	0.79 %	0.79 %
10°	4.81	6.43	2.35 %	3.14 %
15°	7.84	14.28	3.83 %	6.98 %
20°	10.61	24.89	5.19 %	12.16 %
25°	13.03	37.92	6.37 %	18.54 %
30°	15.02	52.94	7.34 %	25.88 %
35°	16.51	69.46	8.07 %	33.95 %
40°	17.48	86.93	8.54 %	42.49 %
45°	17.88	104.81	8.74 %	51.22 %
50°	17.70	122.51	8.65 %	59.88 %
55°	16.96	139.47	8.29 %	68.17 %
60°	15.70	155.17	7.67 %	75.84 %
65°	14.02	169.19	6.85 %	82.69 %
70°	12.04	181.23	5.89 %	88.58 %
75°	9.85	191.08	4.81 %	93.39 %
80°	7.42	198.50	3.63 %	97.02 %
85°	4.56	203.06	2.23 %	99.25 %
90°	1.54	204.61	0.75 %	100.00 %
95°	0.00	204.61	0.00 %	100.00 %
100°	0.00	204.61	0.00 %	100.00 %
105°	0.00	204.61	0.00 %	100.00 %
110°	0.00	204.61	0.00 %	100.00 %
115°	0.00	204.61	0.00 %	100.00 %
120°	0.00	204.61	0.00 %	100.00 %
125°	0.00	204.61	0.00 %	100.00 %
130°	0.00	204.61	0.00 %	100.00 %
135°	0.00	204.61	0.00 %	100.00 %
140°	0.00	204.61	0.00 %	100.00 %
145°	0.00	204.61	0.00 %	100.00 %
150°	0.00	204.61	0.00 %	100.00 %
155°	0.00	204.61	0.00 %	100.00 %
160°	0.00	204.61	0.00 %	100.00 %
165°	0.00	204.61	0.00 %	100.00 %
170°	0.00	204.61	0.00 %	100.00 %
175°	0.00	204.61	0.00 %	100.00 %
180°	0.00	204.61	0.00 %	100.00 %

<b>Luminaire</b>		<b>Measurem.</b>		<b>Lamp</b>	
Code	5373	Code	5373	Code	PL-L24W/840/4P
Name	Ceiling lamp 60x25 no dim	Name	Ceiling lamp 60x25 no dim	Number	4
Line	VIBIA-Link	Date	29-05-2014	Position	Universal
Efficiency	20.46%	Coordinate system	CG	Total Flux	6000.00 lm

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.61	3.23	4.84	6.45	8.07	OC	1.58	3.16	4.74	6.32	7.90
OB	1.61	3.23	4.84	6.45	8.07	OD	1.58	3.16	4.74	6.32	7.90

	0	5	15	25	35	45	55	65	75	85
OA	407.90	406.55	393.79	368.42	331.88	282.07	223.88	159.71	96.93	35.56
OB	407.90	406.55	393.79	368.42	331.88	282.07	223.88	159.71	96.93	35.56
OC	407.90	406.06	391.57	364.97	325.13	277.56	219.76	161.21	104.60	33.00
OD	407.90	406.06	391.57	364.97	325.13	277.56	219.76	161.21	104.60	33.00

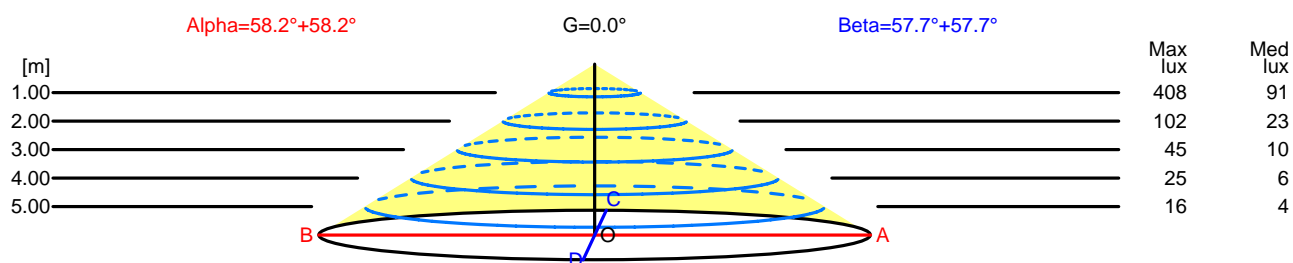


H[m]	D[m]	Max lux	Med lux	Alpha=58.2°+58.2°	G=0.0
1.00	3.23	408	91		
2.00	6.45	102	23		
3.00	9.68	45	10		
4.00	12.91	25	6		
5.00	16.14	16	4		

H[m]	D[m]	Max lux	Med lux	Beta=57.7°+57.7°	G=0.0
1.00	3.16	408	91		
2.00	6.32	102	23		
3.00	9.48	45	10		
4.00	12.64	25	6		
5.00	15.80	16	4		

<b>Luminaire</b>		<b>Measurem.</b>		<b>Lamp</b>	
Code	5373	Code	5373	Code	PL-L24W/840/4P
Name	Ceiling lamp 60x25 no dim	Name	Ceiling lamp 60x25 no dim	Number	4
Line	VIBIA-Link	Date	29-05-2014	Position	Universal
Efficiency	20.46%	Coordinate system	CG	Total Flux	6000.00 lm

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=3.00m

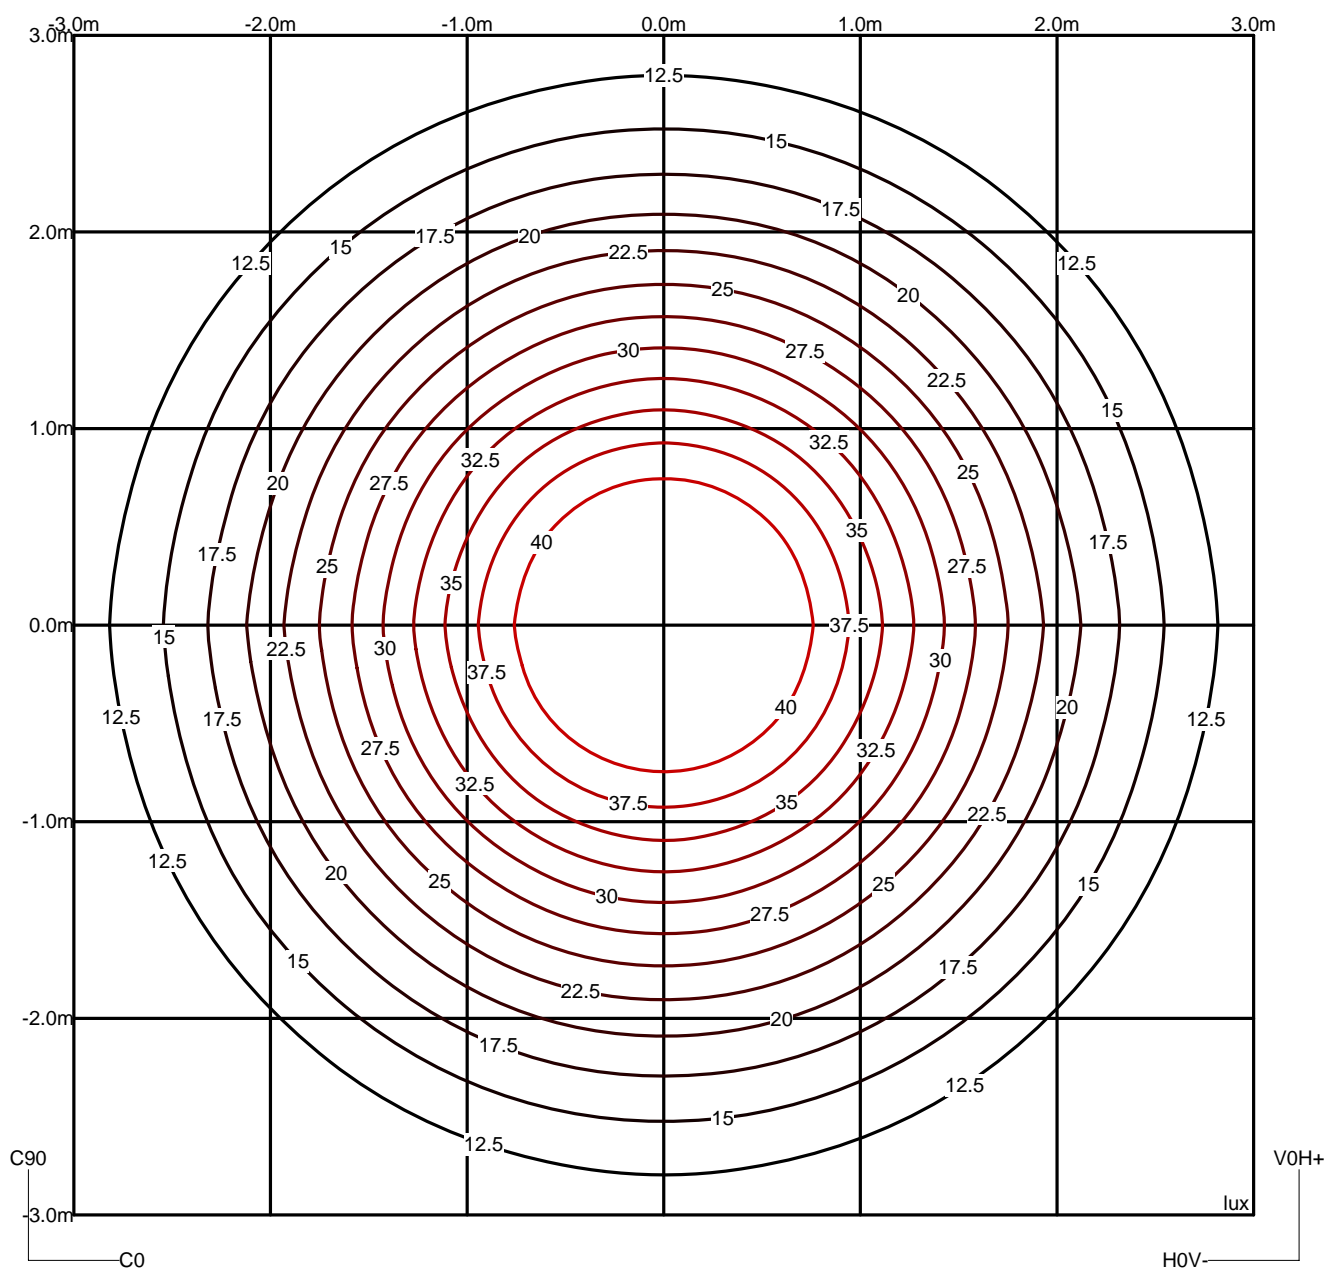



<b>Luminaire</b>				<b>Measur.</b>				<b>Lamp</b>			
Code	5373			Code	5373			Code	PL-L24W/840/4P		
Name	Ceiling lamp 60x25 no dim			Name	Ceiling lamp 60x25 no dim			Number	4		
Line	VIBIA-Link			Date	29-05-2014			Position	Universal		
Efficiency	20.46%			Coordinate system	CG			Total Flux	6000.00 lm		

#### Utilizations CIE

Mounting	Direct				Normalization				Normalised				Suspension Ratio				Standard CIE Settings						

#### Wall

K	8873	8773	8871	8771	7773	7771	7753	7553	7751	7551	7731	7331	7711	7111	5551	5531	5331	5511	5111	3331	3311	1111	0000
0.60	97	95	85	84	93	83	73	72	67	66	56	55	48	48	65	55	55	48	48	55	48	48	43
0.80	110	107	94	92	105	91	86	84	76	75	64	57	56	74	64	64	64	57	56	63	56	56	51
1.00	118	116	99	97	113	96	95	92	82	81	71	70	63	63	79	70	70	63	63	69	63	62	57
1.25	126	124	103	101	121	100	103	101	87	86	77	76	70	69	85	76	75	69	68	75	68	68	62
1.50	132	129	105	104	126	102	109	107	91	90	82	81	74	73	88	80	80	73	73	79	73	72	66
2.00	137	135	106	105	132	104	117	115	94	93	86	85	80	79	92	85	84	79	78	83	78	77	70
2.50	141	139	107	106	135	104	122	120	96	95	89	88	83	82	93	87	87	82	82	86	81	80	72
3.00	143	142	106	106	137	104	126	124	97	97	91	90	86	85	94	89	89	84	84	87	83	82	74
4.00	147	146	107	107	141	105	132	130	100	99	94	94	90	89	97	92	92	88	88	90	87	86	77
5.00	150	149	108	108	144	106	136	134	101	101	97	96	93	92	99	95	95	91	91	93	90	88	79
10.00	157	156	110	110	150	108	145	144	105	105	103	102	100	100	103	100	100	98	98	98	96	95	84
20.00	159	158	109	109	152	107	149	149	106	106	105	104	103	103	103	102	102	101	101	100	99	97	86

#### Working Pl.


K	8873	8773	8871	8771	7773	7771	7753	7553	7751	7551	7731	7331	7711	7111	5551	5531	5331	5511	5111	3331	3311	1111	0000
0.60	119	117	111	109	115	108	91	90	88	87	74	73	64	63	86	73	73	64	63	72	63	63	60
0.80	141	138	130	128	136	126	112	109	106	105	92	91	81	81	104	91	90	81	81	90	80	80	76
1.00	158	155	144	142	152	140	128	126	121	120	107	106	97	96	118	106	105	96	95	104	95	95	91
1.25	175	172	157	156	168	153	145	142	136	134	122	121	112	111	132	120	120	111	110	119	110	109	106
1.50	187	184	167	165	179	163	158	155	147	145	134	132	124	122	143	132	131	122	122	130	121	121	117
2.00	204	202	180	179	196	176	178	175	163	162	152	150	142	141	159	149	148	141	140	147	139	138	135
2.50	216	214	188	187	207	185	191	188	173	172	164	162	155	154	169	161	160	153	152	158	151	150	147
3.00	224	222	194	193	215	191	201	198	181	180	172	171	164	163	176	169	168	162	161	166	160	158	155
4.00	234	233	201	200	225	198	213	211	190	189	183	181	176	175	185	179	179	174	173	176	171	169	166
5.00	241	239	205	205	231	202	221	219	195	195	189	188	184	183	191	186	185	181	180	182	178	176	173
10.00	254	254	214	213	245	211	239	237	207	207	204	203	200	200	202	200	199	197	196	196	193	190	188
20.00	262	261	218	218	252	215	249	248	214	213	212	211	210	209	209	207	207	206	206	203	202	198	196

LM53 SHR C0-C180: 1.274 SHR C90-C270: 1.262 SHR Square: 1.389

<b>Luminaire</b>		<b>Measur.</b>		<b>Lamp</b>	
Code	5373	Code	5373	Code	PL-L24W/840/4P
Name	Ceiling lamp 60x25 no dim	Name	Ceiling lamp 60x25 no dim	Number	4
Line	VIBIA-Link	Date	29-05-2014	Position	Universal
Efficiency	20.46%	Coordinate system	CG	Total Flux	6000.00 lm


Average Luminance [cd/m²]										
0.0°	45°	50°	55°	60°	65°	70°	75°	80°	85°	
2990	2990	2962	2926	2886	2833	2833	2808	2801	3058	---
90.0°	2942	2912	2872	2850	2860	2969	3030	3160	2839	---

Flush mounted or longitudinal view												
		Illumination(lx)										
A	A	2000	1000	750	500		<300					1.15
B	1		2000	1500	1000	750	500	<300				1.5
C					2000		1000	500	<300			1.85
D	2						2000	1000	500	<300		2.2
E	3							2000	1000	500	<300	2.55

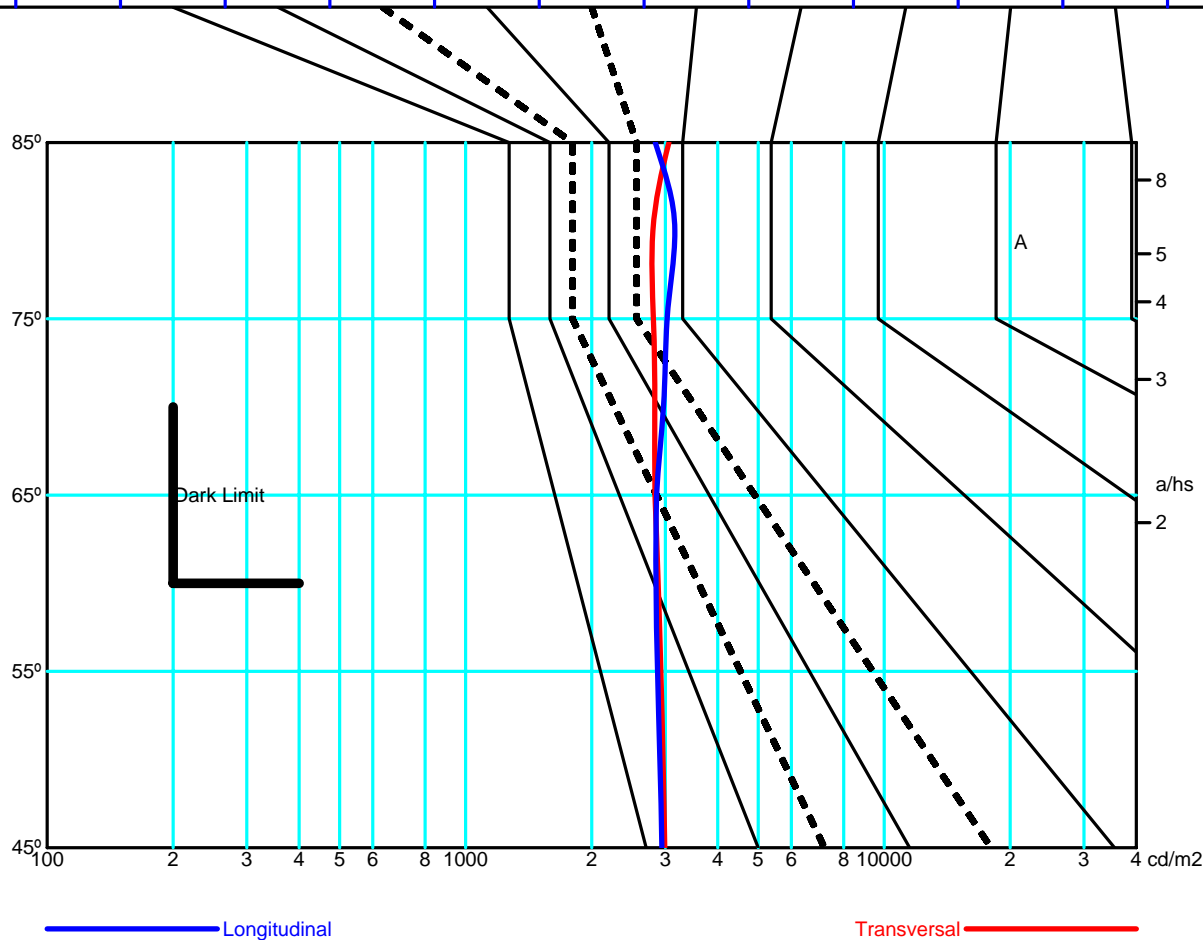

<b>Luminaire</b>		<b>Measur.</b>		<b>Lamp</b>	
Code	5373	Code	5373	Code	PL-L24W/840/4P
Name	Ceiling lamp 60x25 no dim	Name	Ceiling lamp 60x25 no dim	Number	4
Line	VIBIA-Link	Date	29-05-2014	Position	Universal
Efficiency	20.46%	Coordinate system	CG	Total Flux	6000.00 lm

Luminance

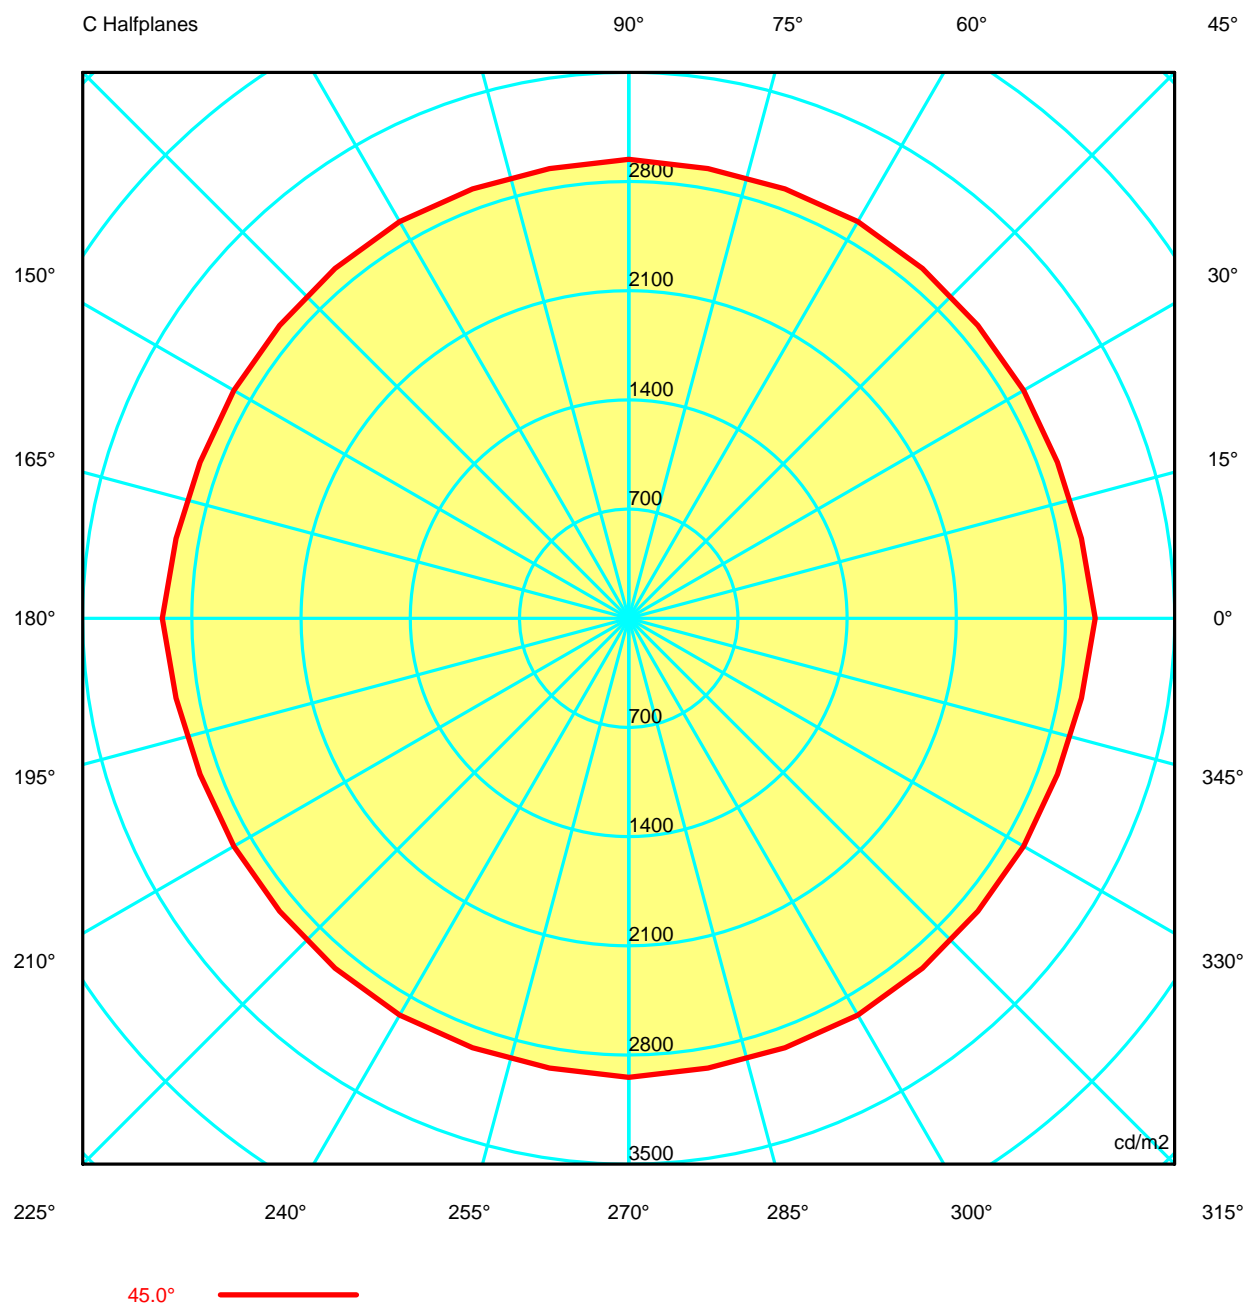

Luminaire					Measur.					Lamp				
Code	5373				Code	5373				Code	PL-L24W/840/4P			
Name	Ceiling lamp 60x25 no dim				Name	Ceiling lamp 60x25 no dim				Number	4			
Line	VIBIA-Link				Date	29-05-2014				Position	Universal			
Efficiency		20.46%			Coordinate system		CG			Total Flux		6000.00 lm		
Luminance cd/m2					Table 1/3									
	C 0.00	C 10.00	C 20.00	C 30.00	C 40.00	C 50.00	C 60.00	C 70.00	C 80.00	C 90.00	C 100.00	C 110.00	C 120.00	
G 0.0	3057.69	3057.69	3057.69	3057.69	3057.69	3057.69	3057.69	3057.69	3057.69	3057.69	3057.69	3057.69	3057.69	
G 5.0	3059.27	3056.42	3055.69	3055.86	3055.58	3054.95	3054.68	3055.01	3055.39	3055.56	3055.39	3055.01	3054.68	
G 10.0	3063.99	3055.25	3049.94	3049.02	3050.66	3051.16	3050.73	3050.23	3051.20	3053.49	3051.20	3050.23	3050.73	
G 15.0	3056.05	3046.72	3044.58	3045.50	3045.13	3043.32	3041.87	3041.22	3040.35	3038.85	3040.35	3041.22	3041.87	
G 20.0	3056.16	3042.57	3033.29	3030.60	3033.38	3035.44	3033.67	3030.12	3030.05	3034.30	3030.05	3030.12	3033.67	
G 25.0	3047.28	3028.02	3021.52	3020.76	3019.92	3016.61	3012.10	3015.37	3018.06	3018.73	3018.06	3015.37	3012.10	
G 30.0	3032.77	3007.14	3000.62	3002.09	2999.20	2996.49	2998.66	3001.76	3002.18	2999.67	3002.18	3001.76	2998.66	
G 35.0	3037.09	2990.67	2975.87	2974.71	2972.56	2975.15	2983.83	2985.28	2981.21	2975.35	2981.21	2985.28	2983.83	
G 40.0	2992.74	2958.54	2953.34	2966.78	2962.59	2957.54	2956.56	2956.30	2954.82	2950.98	2954.82	2956.30	2956.56	
G 45.0	2990.35	2946.25	2924.71	2923.16	2921.58	2928.67	2937.60	2929.47	2927.95	2942.46	2927.95	2929.47	2937.60	
G 50.0	2961.61	2914.13	2898.33	2896.93	2899.20	2898.14	2891.04	2886.13	2893.13	2911.59	2893.13	2886.13	2891.04	
G 55.0	2925.94	2866.16	2847.95	2848.34	2853.78	2858.32	2864.26	2867.89	2870.12	2872.12	2870.12	2867.89	2864.26	
G 60.0	2885.56	2809.83	2791.83	2798.86	2804.44	2814.84	2833.57	2842.48	2846.22	2850.10	2846.22	2842.48	2833.57	
G 65.0	2832.83	2757.90	2736.10	2759.76	2775.77	2789.54	2811.27	2837.76	2854.68	2859.51	2854.68	2837.76	2811.27	
G 70.0	2832.91	2725.75	2674.67	2684.58	2720.44	2787.78	2859.32	2887.55	2916.56	2968.74	2916.56	2887.55	2859.32	
G 75.0	2807.53	2672.75	2631.57	2694.63	2792.18	2864.42	2933.78	3054.28	3097.28	3029.68	3097.28	3054.28	2933.78	
G 80.0	2800.68	2628.62	2589.97	2742.58	3011.38	3105.04	3046.27	3118.11	3182.91	3160.11	3182.91	3118.11	3046.27	
G 85.0	3058.19	2697.54	2585.87	2681.89	2738.00	2822.81	2929.51	2936.26	2889.96	2838.69	2889.96	2936.26	2929.51	
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

Luminaire					Measurem.					Lamp			
Code	5373				Code	5373				Code	PL-L24W/840/4P		
Name	Ceiling lamp 60x25 no dim				Name	Ceiling lamp 60x25 no dim				Number	4		
Line	VIBIA-Link				Date	29-05-2014				Position	Universal		
Efficiency		20.46%			Coordinate system		CG			Total Flux		6000.00 lm	
Luminance cd/m2													
Table 2/3													
	C 130.00	C 140.00	C 150.00	C 160.00	C 170.00	C 180.00	C 190.00	C 200.00	C 210.00	C 220.00	C 230.00	C 240.00	C 250.00
G 0.0	3057.69	3057.69	3057.69	3057.69	3057.69	3057.69	3057.69	3057.69	3057.69	3057.69	3057.69	3057.69	3057.69
G 5.0	3054.95	3055.58	3055.86	3055.69	3056.42	3059.27	3056.42	3055.69	3055.86	3055.58	3054.95	3054.68	3055.01
G 10.0	3051.16	3050.66	3049.02	3049.94	3055.25	3063.99	3055.25	3049.94	3049.02	3050.66	3051.16	3050.73	3050.23
G 15.0	3043.32	3045.13	3045.50	3044.58	3046.72	3056.05	3046.72	3044.58	3045.50	3045.13	3043.32	3041.87	3041.22
G 20.0	3035.44	3033.38	3030.60	3033.29	3042.57	3056.16	3042.57	3033.29	3030.60	3033.38	3035.44	3033.67	3030.12
G 25.0	3016.61	3019.92	3020.76	3021.52	3028.02	3047.28	3028.02	3021.52	3020.76	3019.92	3016.61	3012.10	3015.37
G 30.0	2996.49	2999.20	3002.09	3000.62	3007.14	3032.77	3007.14	3000.62	3002.09	2999.20	2996.49	2998.66	3001.76
G 35.0	2975.15	2972.56	2974.71	2975.87	2990.67	3037.09	2990.67	2975.87	2974.71	2972.56	2975.15	2983.83	2985.28
G 40.0	2957.54	2962.59	2966.78	2953.34	2958.54	2992.74	2958.54	2953.34	2966.78	2962.59	2957.54	2956.56	2956.30
G 45.0	2928.67	2921.58	2923.16	2924.71	2946.25	2990.35	2946.25	2924.71	2923.16	2921.58	2928.67	2937.60	2929.47
G 50.0	2898.14	2899.20	2896.93	2898.33	2914.13	2961.61	2914.13	2898.33	2896.93	2899.20	2898.14	2891.04	2886.13
G 55.0	2858.32	2853.78	2848.34	2847.95	2866.16	2925.94	2866.16	2847.95	2848.34	2853.78	2858.32	2864.26	2867.89
G 60.0	2814.84	2804.44	2798.86	2791.83	2809.83	2885.56	2809.83	2791.83	2798.86	2804.44	2814.84	2833.57	2842.48
G 65.0	2789.54	2775.77	2759.76	2736.10	2757.90	2832.83	2757.90	2736.10	2759.76	2775.77	2789.54	2811.27	2837.76
G 70.0	2787.78	2720.44	2684.58	2674.67	2725.75	2832.91	2725.75	2674.67	2684.58	2720.44	2787.78	2859.32	2887.55
G 75.0	2864.42	2792.18	2694.63	2631.57	2672.75	2807.53	2672.75	2631.57	2694.63	2792.18	2864.42	2933.78	3054.28
G 80.0	3105.04	3011.38	2742.58	2589.97	2628.62	2800.68	2628.62	2589.97	2742.58	3011.38	3105.04	3046.27	3118.11
G 85.0	2822.81	2738.00	2681.89	2585.87	2697.54	3058.19	2697.54	2585.87	2681.89	2738.00	2822.81	2929.51	2936.26
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Luminaire					Measur.					Lamp			
Code	5373				Code	5373				Code	PL-L24W/840/4P		
Name	Ceiling lamp 60x25 no dim				Name	Ceiling lamp 60x25 no dim				Number	4		
Line	VIBIA-Link				Date	29-05-2014				Position	Universal		
Efficiency		20.46%			Coordinate system		CG			Total Flux		6000.00 lm	
Luminance cd/m2 Table 3/3													
	C 180.00	C 190.00	C 200.00	C 210.00	C 220.00	C 230.00	C 240.00	C 250.00	C 260.00	C 270.00	C 280.00	C 290.00	C 300.00
G 0.0	3057.69	3057.69	3057.69	3057.69	3057.69	3057.69	3057.69	3057.69	3057.69	3057.69	3057.69	3057.69	3057.69
G 5.0	3059.27	3056.42	3055.69	3055.86	3055.58	3054.95	3054.68	3055.01	3055.39	3055.56	3055.39	3055.01	3054.68
G 10.0	3063.99	3055.25	3049.94	3049.02	3050.66	3051.16	3050.73	3050.23	3051.20	3053.49	3051.20	3050.23	3050.73
G 15.0	3056.05	3046.72	3044.58	3045.50	3045.13	3043.32	3041.87	3041.22	3040.35	3038.85	3040.35	3041.22	3041.87
G 20.0	3056.16	3042.57	3033.29	3030.60	3033.38	3035.44	3033.67	3030.12	3030.05	3034.30	3030.05	3030.12	3033.67
G 25.0	3047.28	3028.02	3021.52	3020.76	3019.92	3016.61	3012.10	3015.37	3018.06	3018.73	3018.06	3015.37	3012.10
G 30.0	3032.77	3007.14	3000.62	3002.09	2999.20	2996.49	2998.66	3001.76	3002.18	2999.67	3002.18	3001.76	2998.66
G 35.0	3037.09	2990.67	2975.87	2974.71	2972.56	2975.15	2983.83	2985.28	2981.21	2975.35	2981.21	2985.28	2983.83
G 40.0	2992.74	2958.54	2953.34	2966.78	2962.59	2957.54	2956.56	2956.30	2954.82	2950.98	2954.82	2956.30	2956.56
G 45.0	2990.35	2946.25	2924.71	2923.16	2921.58	2928.67	2937.60	2929.47	2927.95	2942.46	2927.95	2929.47	2937.60
G 50.0	2961.61	2914.13	2898.33	2896.93	2899.20	2898.14	2891.04	2886.13	2893.13	2911.59	2893.13	2886.13	2891.04
G 55.0	2925.94	2866.16	2847.95	2848.34	2853.78	2858.32	2864.26	2867.89	2870.12	2872.12	2870.12	2867.89	2864.26
G 60.0	2885.56	2809.83	2791.83	2798.86	2804.44	2814.84	2833.57	2842.48	2846.22	2850.10	2846.22	2842.48	2833.57
G 65.0	2832.83	2757.90	2736.10	2759.76	2775.77	2789.54	2811.27	2837.76	2854.68	2859.51	2854.68	2837.76	2811.27
G 70.0	2832.91	2725.75	2674.67	2684.58	2720.44	2787.78	2859.32	2887.55	2916.56	2968.74	2916.56	2887.55	2859.32
G 75.0	2807.53	2672.75	2631.57	2694.63	2792.18	2864.42	2933.78	3054.28	3097.28	3029.68	3097.28	3054.28	2933.78
G 80.0	2800.68	2628.62	2589.97	2742.58	3011.38	3105.04	3046.27	3118.11	3182.91	3160.11	3182.91	3118.11	3046.27
G 85.0	3058.19	2697.54	2585.87	2681.89	2738.00	2822.81	2929.51	2936.26	2889.96	2838.69	2889.96	2936.26	2929.51
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00