

**Luminaire**


Code 5774  
Name Tempo

**Measur.**


Code CL252A18F013G.V1  
Name 2700K CRI 90

Luminaire Flux	302.04 lm	Luminaire Power	5.42 W	Efficacy	55.71 lm/W	Efficiency	100.00%
Sources Flux	302.04 lm	Maximum value	203.44 cd	Position	C=0.00 G=0.00	CG	Double Symmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	1 mm 1 mm	Height Height	1 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.000000 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000000 m2	
Coordinate system Date Measurement Distance		CG 05-07-2018 6.44		Symmetry Type Maximum Gamma Angle Measurement Flux		Double Symmetrical 180 302.04 lm	
Operator Temperature Humidity Notes		Asselum T2 25.10 °C 58.70 % RM18062407.1		Rated Voltage Rated Current Photocell		230.19 V 0.03 A Prc	

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
CREE XHP50B-00-0000-0D0UG227H	1x 5750134	1x LED 4W 350mA	302.04	5.42	1	
C.I.E.	69 88 96 89 100	D DIN 5040	B51			
F UTE	0.89 C + 0.11 T	B NBN	BZ 2 / 2 / BZ 3			



ULOR 10.55 %  
DLOR 89.45 %  
RN 10.55 %

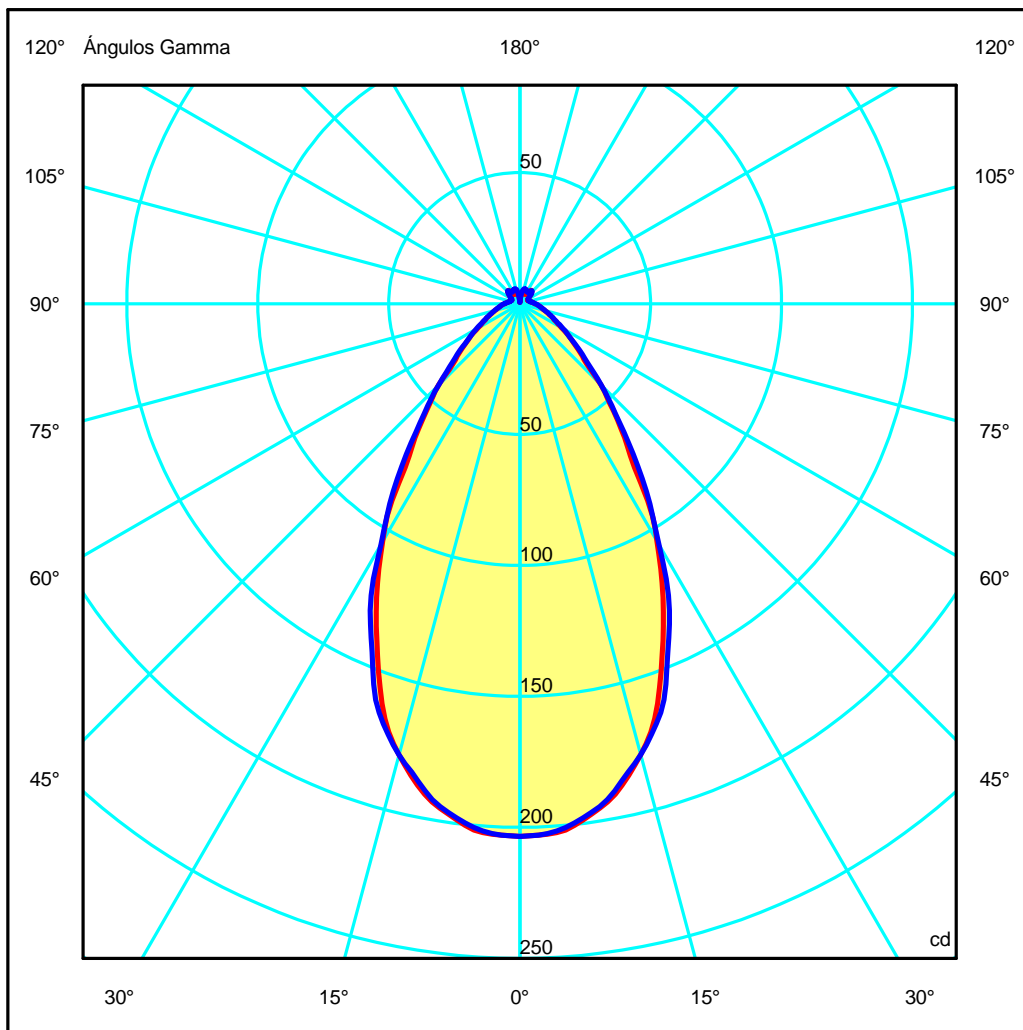

**Luminaire**

Code 5774  
Name Tempo

**Measurem.**

Code CL252A18F013G.V1  
Name 2700K CRI 90

Luminaire Flux	302.04 lm	Luminaire Power	5.42 W	Efficacy	55.71 lm/W	Efficiency	100.00%
Sources Flux	302.04 lm	Maximum value	203.44 cd	Position	C=0.00 G=0.00	CG	Double Symmetrical

**Luminous Intensity Table cd Table 1/1**

	C 0.00	C 15.00	C 30.00	C 45.00	C 60.00	C 75.00	C 90.00
G 0.0	203	203	203	203	203	203	203
G 2.5	203	202	203	202	203	202	203
G 5.0	202	201	201	200	201	199	201
G 7.5	198	197	198	197	197	196	197
G 10.0	193	192	192	191	193	191	192
G 12.5	186	185	185	185	186	186	185
G 15.0	178	178	178	179	179	179	178
G 17.5	169	167	169	171	169	171	170
G 20.0	156	158	159	162	160	161	161
G 22.5	142	147	148	151	147	150	147
G 25.0	130	132	134	137	135	138	135
G 27.5	117	119	118	123	121	125	122
G 30.0	105	106	105	108	108	113	106
G 32.5	93	93	93	95	94	95	94
G 35.0	76	79	81	83	80	82	82
G 37.5	67	69	70	72	69	70	70
G 40.0	58	59	59	61	59	60	59
G 42.5	50	50	49	51	51	52	51
G 45.0	44	43	42	43	43	45	44
G 47.5	35	37	36	37	37	39	37
G 50.0	31	31	32	32	32	33	32
G 52.5	27	28	28	28	28	28	28
G 55.0	24	24	25	24	24	25	24
G 57.5	21	21	21	21	21	22	22
G 60.0	18	19	18	19	19	19	19
G 62.5	16	17	16	17	17	17	17
G 65.0	15	15	15	15	15	15	15
G 67.5	13	13	13	13	13	14	13
G 70.0	12	12	12	12	12	12	12
G 72.5	11	11	11	11	11	11	11
G 75.0	10	10	10	10	10	10	10
G 77.5	9	9	9	9	9	9	9
G 80.0	8	8	8	8	8	8	8
G 82.5	8	8	8	8	8	8	8
G 85.0	7	7	7	7	7	7	7
G 87.5	6	6	6	7	6	7	6
G 90.0	6	6	6	6	6	6	6
G 92.5	5	5	5	5	5	6	5
G 95.0	5	5	5	5	5	5	5
G 97.5	5	5	4	5	5	5	5
G100.0	4	4	4	4	4	4	4
G102.5	4	4	4	4	4	4	4
G105.0	4	4	4	4	4	4	4
G107.5	4	4	4	4	4	4	4
G110.0	3	3	3	3	3	4	4
G112.5	3	3	3	3	3	3	3
G115.0	3	3	3	3	3	3	3
G117.5	3	3	3	3	3	4	3
G120.0	4	4	4	4	4	4	4
G122.5	4	4	4	4	4	4	4
G125.0	4	4	4	5	4	4	4
G127.5	5	5	5	5	5	5	5
G130.0	6	6	6	6	6	5	6
G132.5	6	6	6	6	6	6	6
G135.0	6	7	7	7	7	7	7
G137.5	7	7	7	7	7	7	7
G140.0	7	7	8	8	8	7	6
G142.5	6	7	8	8	8	8	6
G145.0	5	7	8	9	8	8	5
G147.5	4	7	8	9	9	8	5
G150.0	4	6	8	9	9	8	5
G152.5	4	6	8	9	8	7	6
G155.0	4	6	8	8	8	7	6
G157.5	4	6	7	8	8	7	6
G160.0	5	5	7	8	8	7	6
G162.5	5	5	7	7	7	6	6
G165.0	5	5	6	7	7	6	6
G167.5	5	5	6	6	6	5	5
G170.0	4	4	5	5	5	4	4
G172.5	3	3	4	3	3	3	3
G175.0	1	1	1	2	1	1	1
G177.5	1	1	1	1	1	1	1
G180.0	1	1	1	1	1	1	1



**Luminaire**

Code 5774  
Name Tempo

**Measur.**

Code CL252A18F013G.V1  
Name 2700K CRI 90

Luminaire Flux	302.04 lm	Luminaire Power	5.42 W	Efficacy	55.71 lm/W	Efficiency	100.00%
Sources Flux	302.04 lm	Maximum value	203.44 cd	Position	C=0.00 G=0.00	CG	Double Symmetrical

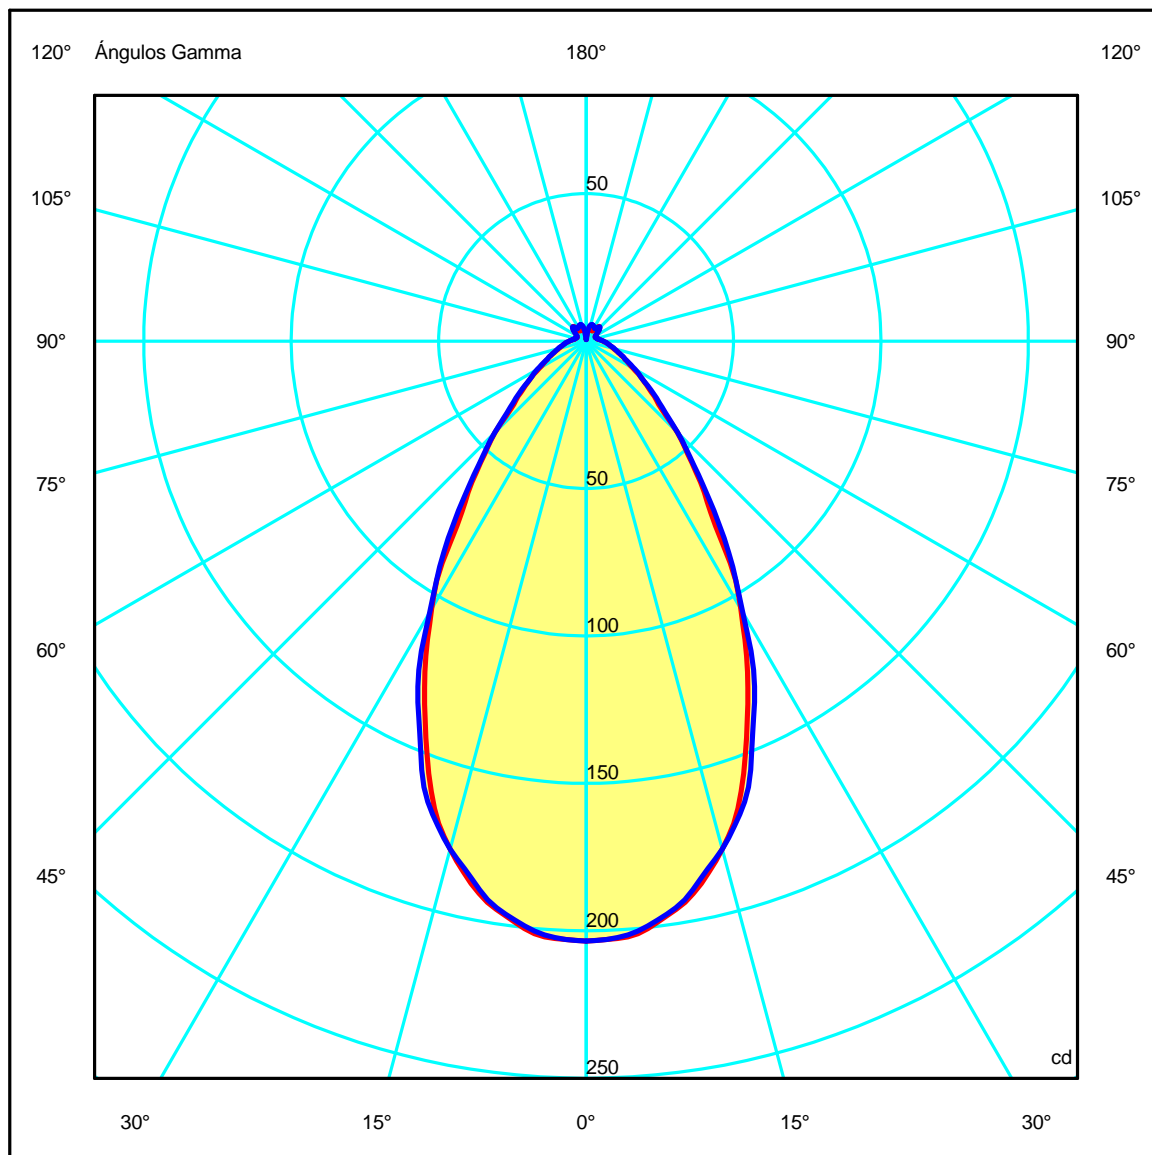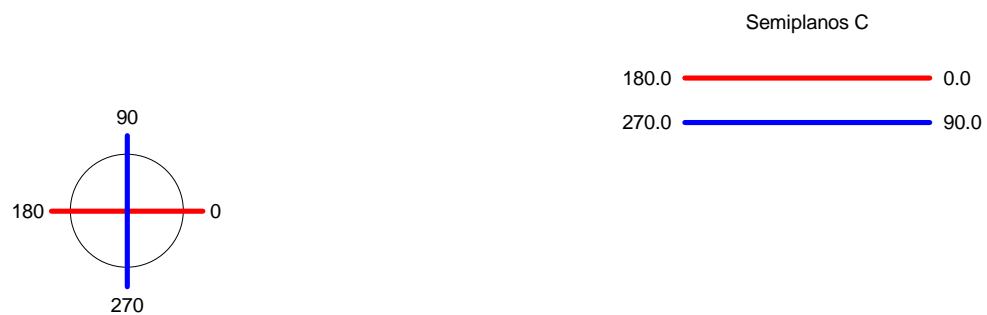


**Luminaire**

Code 5774  
Name Tempo

**Measur.**


Code CL252A18F013G.V1  
Name 2700K CRI 90

Luminaire Flux	302.04 lm	Luminaire Power	5.42 W	Efficacy	55.71 lm/W	Efficiency	100.00%
Sources Flux	302.04 lm	Maximum value	203.44 cd	Position	C=0.00 G=0.00	CG	Double Symmetrical



Semiplanos C

180.0	—	0.0
270.0	—	90.0

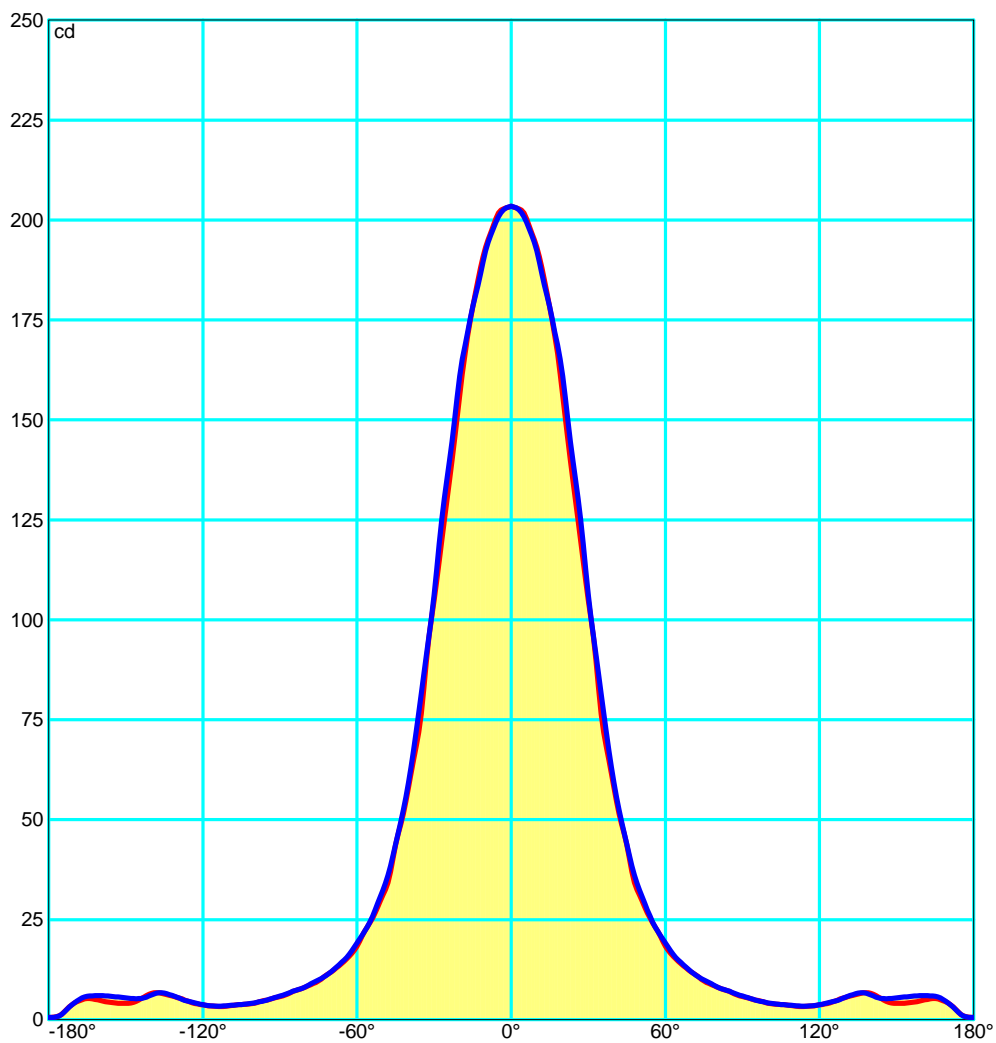

**Luminaire**

Code 5774

Name Tempo

**Measur.**

Code CL252A18F013G.V1

Name 2700K CRI 90


Luminaire Flux	302.04 lm	Luminaire Power	5.42 W	Efficacy	55.71 lm/W	Efficiency	100.00%
Sources Flux	302.04 lm	Maximum value	203.44 cd	Position	C=0.00 G=0.00	CG	Double Symmetrical

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.59	1.19	1.78	2.37	2.97	OC	0.60	1.19	1.79	2.39	2.98
OB	0.59	1.19	1.78	2.37	2.97	OD	0.60	1.19	1.79	2.39	2.98

Luminous Intensities [ cd]

	0	5	15	25	35	45	55	65	75	85
OA	203.44	201.72	178.30	129.76	76.41	43.80	24.17	14.54	9.63	7.01
OB	203.44	201.72	178.30	129.76	76.41	43.80	24.17	14.54	9.63	7.01
OC	203.44	200.81	178.34	135.08	81.52	43.90	24.35	14.88	9.91	7.08
OD	203.44	200.81	178.34	135.08	81.52	43.90	24.35	14.88	9.91	7.08

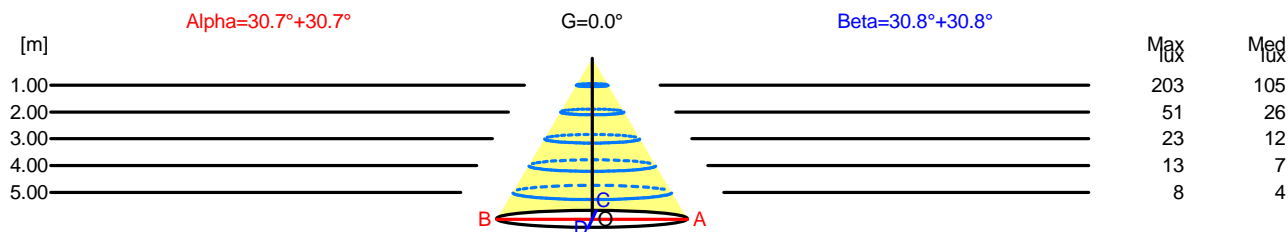

H[m]	D[m]	Max lux	Med lux	Alpha=30.7°+30.7°	G=0.0	
1.00	1.19	203	105			
2.00	2.37	51	26			
3.00	3.56	23	12			
4.00	4.75	13	7			
5.00	5.94	8	4			

H[m]	D[m]	Max lux	Med lux	Beta=30.8°+30.8°	G=0.0	
1.00	1.19	203	105			
2.00	2.39	51	26			
3.00	3.58	23	12			
4.00	4.77	13	7			
5.00	5.96	8	4			

**Luminaire**

Code 5774  
Name Tempo

**Measurem.**

Code CL252A18F013G.V1  
Name 2700K CRI 90

Luminaire Flux	302.04 lm	Luminaire Power	5.42 W	Efficacy	55.71 lm/W	Efficiency	100.00%
Sources Flux	302.04 lm	Maximum value	203.44 cd	Position	C=0.00 G=0.00	CG	Double Symmetrical

Flujo Total=302.04 Flujo Luminaria=302.04

RI	0.60	0.80	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	10.00	20.00
DRR	0.48	0.55	0.62	0.67	0.71	0.78	0.82	0.85	0.89	0.91	0.95	0.98
RC	2	2	2	2	2	2	2	2	2	2	2	2

Flujo Zonal por 1000 Lúmenes


Y°	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
ZF(Y)	62	227	431	600	712	785	834	869	895	912	926	937	950	967	983	994	999	1000

Códigos de Flujo C.I.E.

69 88 96 89 100

C.I.E. 2  
D DIN 5040 B51  
F UTE 0.89 C + 0.11 T  
B NBN BZ 2 / 2 / BZ 3  
RN 10.54882 %  
BLF 1.0

LOR 100.00000 %  
ULOR 10.54882 %  
DLOR 89.45118 %  
UFF 10.54882 %  
DFF 89.45118 %  
FFR 11.79282 %

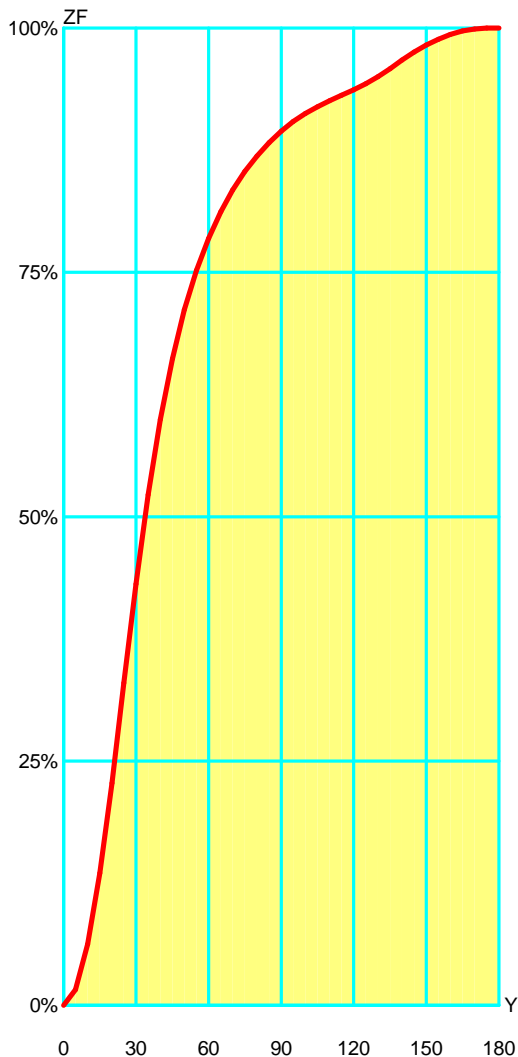

Flujo Zonal				
Gamma °	Flujo	Suma lm	Flujo [%]	Suma [%]
0°	0.00	0.00	0.00%	0.00 %
5°	15.98	15.98	1.60 %	1.60 %
10°	46.49	62.47	4.65 %	6.25 %
15°	72.69	135.16	7.27 %	13.52 %
20°	92.25	227.41	9.22 %	22.74 %
25°	102.29	329.69	10.23 %	32.97 %
30°	101.35	431.04	10.13 %	43.10 %
35°	91.50	522.54	9.15 %	52.25 %
40°	77.00	599.55	7.70 %	59.95 %
45°	62.26	661.80	6.23 %	66.18 %
50°	49.93	711.73	4.99 %	71.17 %
55°	40.33	752.06	4.03 %	75.21 %
60°	32.88	784.95	3.29 %	78.49 %
65°	26.96	811.90	2.70 %	81.19 %
70°	22.40	834.31	2.24 %	83.43 %
75°	18.85	853.16	1.89 %	85.32 %
80°	15.98	869.15	1.60 %	86.91 %
85°	13.68	882.83	1.37 %	88.28 %
90°	11.69	894.51	1.17 %	89.45 %
95°	9.78	904.29	0.98 %	90.43 %
100°	8.14	912.44	0.81 %	91.24 %
105°	6.96	919.39	0.70 %	91.94 %
110°	6.26	925.66	0.63 %	92.57 %
115°	5.67	931.33	0.57 %	93.13 %
120°	5.61	936.94	0.56 %	93.69 %
125°	6.17	943.11	0.62 %	94.31 %
130°	7.20	950.31	0.72 %	95.03 %
135°	8.19	958.50	0.82 %	95.85 %
140°	8.66	967.16	0.87 %	96.72 %
145°	8.24	975.40	0.82 %	97.54 %
150°	7.25	982.64	0.72 %	98.26 %
155°	6.07	988.72	0.61 %	98.87 %
160°	4.79	993.51	0.48 %	99.35 %
165°	3.52	997.02	0.35 %	99.70 %
170°	2.15	999.18	0.22 %	99.92 %
175°	0.75	999.92	0.07 %	99.99 %
180°	0.08	1000.00	0.01 %	100.00 %

**Luminaire**

Code 5774  
Name Tempo

**Measur.**

Code CL252A18F013G.V1  
Name 2700K CRI 90

Luminaire Flux	302.04 lm	Luminaire Power	5.42 W	Efficacy	55.71 lm/W	Efficiency	100.00%
Sources Flux	302.04 lm	Maximum value	203.44 cd	Position	C=0.00 G=0.00	CG	Double Symmetrical

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

